


# Havis Docking Solutions Information for Dell Latitude 12 Rugged Tablet


## DS-DELL-600 Series

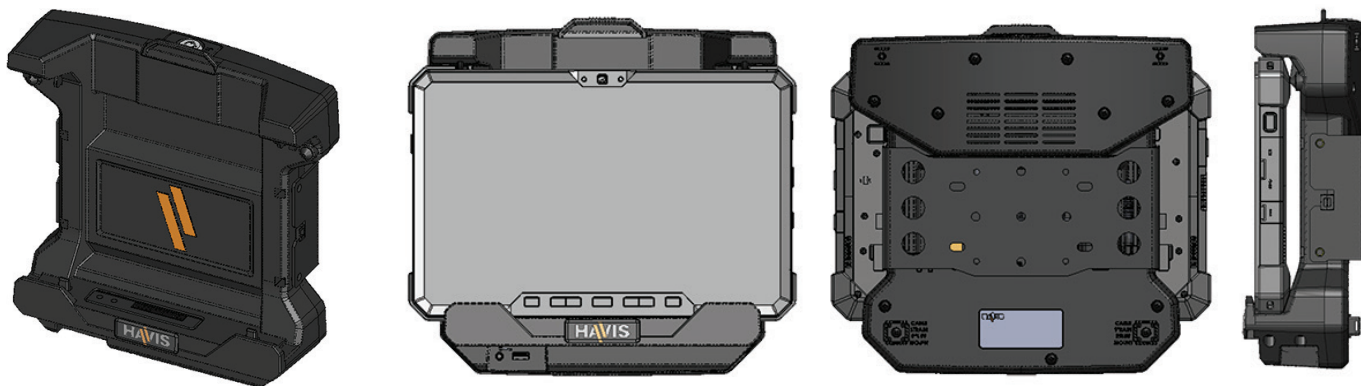

### Specifications

Height: 14.1" (35.8 cm) Width: 13.7" (34.8 cm) Depth: 3.0" (7.5 cm) Weight: 4.7 lbs. (2.1 kg)


## DS-DELL-610 Series

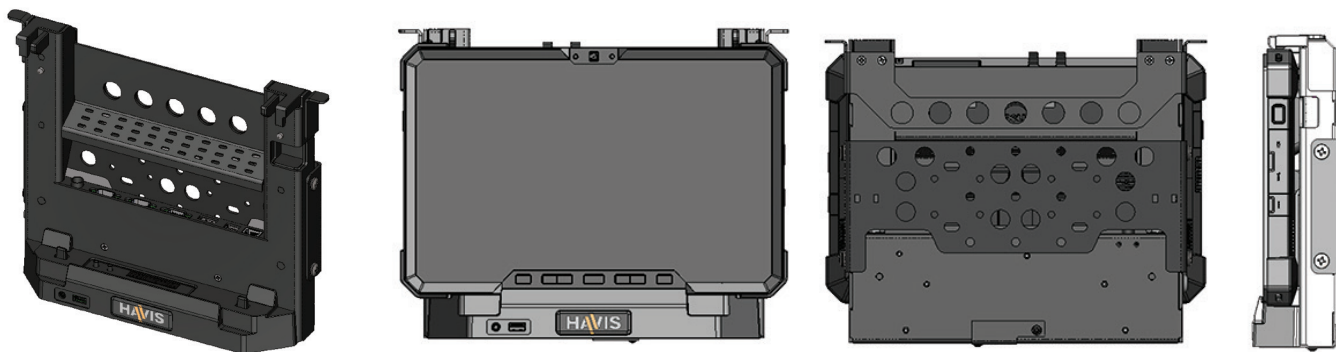

### Specifications

Height: 10.1" (25.6 cm) Width: 12.5" (31.6 cm) Depth: 2.9" (7.4 cm) Weight: 4.3 lbs. (2.0 kg)

## DS-DELL-700 Series

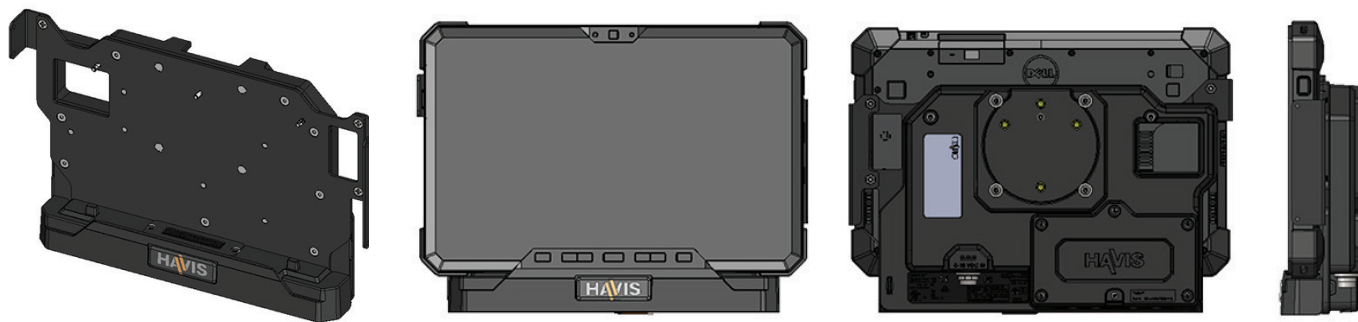

### Specifications

Height: 7.7" (19.5 cm) Width: 12.7" (32.2 cm) Depth: 2.6" (6.7 cm) Weight: 2.2 lbs. (1.1 kg)

# Havis Docking Solutions Information for Dell Latitude 12 Rugged Tablet

## Solutions Comparison

| Feature   | DS-DELL-600 Series   | DS-DELL-610 Series   | DS-DELL-700 Series                   |
|---|--|--|--------------------------------------|
| Availability  | Now Available  | April 2017   | Now Available                        |
| Patent Pending  | No   | No   | Yes                                  |
| IP65 Compliant  | No   | No   | Optional                             |
| Tablet Dock/Undock Ability                              | Yes  | Yes  | No, Fixed                            |
| Cradle Only (No Electronics)                            | Optional   | Optional   | No                                   |
| Antenna Pass Through Connection ( <i>Dual Hi-Gain</i> ) | Optional   | Optional   | N/A                                  |
| Full I/O  | Yes  | Yes  | No                                   |
| Integrated Internal Power Supply                        | Optional   | No   | Yes                                  |
| Front Accessible USB (2.0)                              | Yes  | Yes  | No                                   |
| Powered Serial Port                                     | No   | No   | Optional (+5 V or +12 V)             |
| Material Construction                                   | PC-ABS & Steel   | Aluminum & Steel   | PC-ABS & Aluminum                    |
| Havis Screen Blanking                                   | Optional (Part # DS-DA-801)                                  | Optional (Part # DS-DA-801)                                  | Optional (PKG-DS-DELL-7XX available) |
| Lock & Key Protection                                   | Yes  | Yes  | Security Screws                      |
| Havis Enhanced Protection Plan                          | Yes  | Yes  | Yes                                  |
| Mounting Pattern  | Havis Motion Devices & VESA 75 (as well as most competitors) | Havis Motion Devices & VESA 75 (as well as most competitors) | VESA 75 & RAM D202U                  |
| Support Dell Tablet Accessories                         | Yes  | Yes  | No                                   |
| Support for 3rd Party Hand Straps                       | Yes  | No   | No                                   |

## Port Replication

| Part Number   | USB 2.0 (front) | USB 3.0 | Ethernet | Serial                              | VGA | DisplayPort | Bundled Power Supply | Internal Power Supply | Dock Input Power             | Antenna Connection (Optional Dual Hi-Gain) |
|---------------|-----------------|---------|----------|-------------------------------------|-----|-------------|----------------------|-----------------------|------------------------------|--|
| DS-DELL-601   | 1               | 2       | 1        | 2                                   | 1   | 1           | No                   | No                    | 19.5 V DC*                   | None DS-DELL-601-2                         |
| DS-DELL-602   | 1               | 2       | 1        | 2                                   | 1   | 1           | Yes                  | No                    | 19.5 V DC                    | None DS-DELL-602-2                         |
| DS-DELL-603** | 0               | 0       | 0        | 0                                   | 0   | 0           | No                   | No                    | n/a                          | None DS-DELL-603-2                         |
| DS-DELL-604   | 1               | 2       | 1        | 2                                   | 1   | 1           | No                   | Yes                   | 10-17 V DC                   | None DS-DELL-604-2                         |
| DS-DELL-611   | 1               | 2       | 1        | 2                                   | 1   | 1           | No                   | No                    | 19.5 V DC*                   | None DS-DELL-611-2                         |
| DS-DELL-612   | 1               | 2       | 1        | 2                                   | 1   | 1           | Yes                  | No                    | 19.5 V DC                    | None DS-DELL-612-2                         |
| DS-DELL-613** | 0               | 0       | 0        | 0                                   | 0   | 0           | No                   | No                    | n/a                          | None DS-DELL-613-2                         |
| DS-DELL-616** | 0               | 0       | 0        | 0                                   | 0   | 0           | Yes                  | No                    | n/a                          | None DS-DELL-616-2                         |
| DS-DELL-701   | 0               | 3       | 1        | 1                                   | 0   | 0           | No                   | Yes                   | 12 VDC IN NOM (10-17 VDC IN) | None                                       |
| DS-DELL-702   | 0               | 3       | 1        | 1 - Powered Serial (+5V on pin #9)  | 0   | 0           | No                   | Yes                   | 12 VDC IN NOM (10-17 VDC IN) | None                                       |
| DS-DELL-703   | 0               | 3       | 1        | 1 - Powered Serial (+12V on pin #9) | 0   | 0           | No                   | Yes                   | 12 VDC IN NOM (10-17 VDC IN) | None                                       |
| DS-DELL-704   | 0               | 3       | 1        | 1                                   | 0   | 0           | No                   | Yes                   | 12 VDC IN NOM (10-17 VDC IN) | None                                       |
| DS-DELL-705   | 0               | 3       | 1        | 1 - Powered Serial (+5V on pin #9)  | 0   | 0           | No                   | Yes                   | 12 VDC IN NOM (10-17 VDC IN) | None                                       |
| DS-DELL-706   | 0               | 3       | 1        | 1 - Powered Serial (+12V on pin #9) | 0   | 0           | No                   | Yes                   | 12 VDC IN NOM (10-17 VDC IN) | None                                       |

\* Requires an external Dell authorized DC power supply

\*\* Cradle only option (no electronics)