



CONSOLES

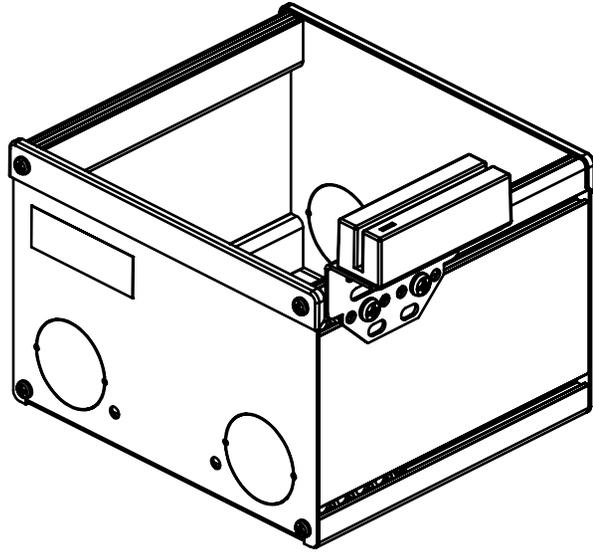

1. ATTACH CARD READER TO BRACKET USING SUPPLIED HARDWARE IF APPLICABLE
2. ATTACH CARD READER TO ASSEMBLY USING 2X, 1/4-20 X 1/2" PPHMS, 1/4-" FLAT WASHERS


C-3090

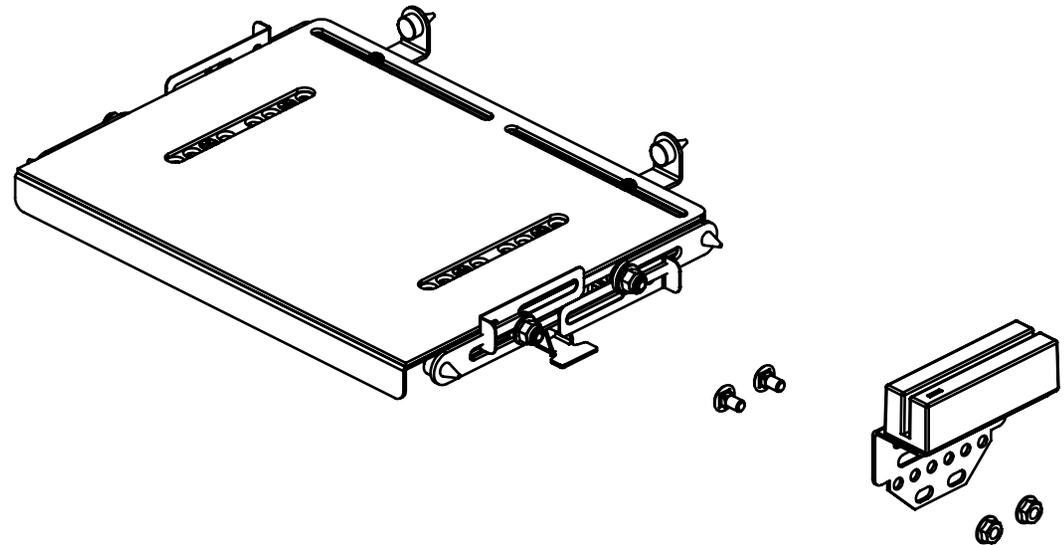

1. ATTACH CARD READER TO BRACKET USING SUPPLIED HARDWARE IF APPLICABLE.
2. EXTEND 3090 ASSEMBLY MOVING THE TWO HOLD DOWN TABS IF NECESSARY.
3. INSERT TWO CARRIAGE BOLTS THROUGH 3090 ASSEMBLY & CARD READER BRACKET IF NECESSARY.
4. FASTEN USING 1/4-20 SERRATED NUTS.

C-CSR-2 INSTALL INSTRUCTIONS


FLAT SURFACE & TRAK

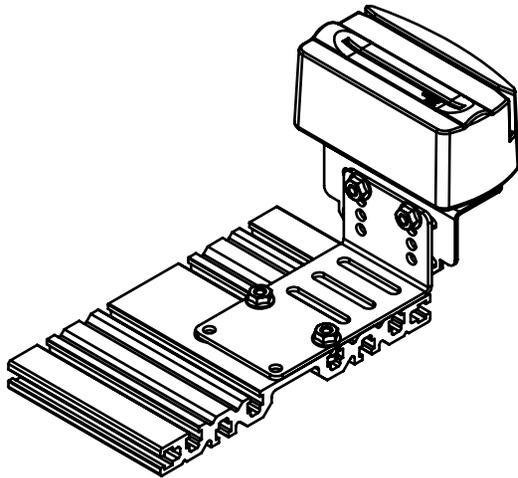

1. ATTACH CARD READER TO BRACKET USING SUPPLIED HARDWARE IF APPLICABLE
2. ATTACH SECONDARY BRACKET TO TRAK OR OTHER FLAT SURFACE. USING 2X, 1/4-20 X 1/2" HHCS & 1/4-20 SERRATED NUTS. NOTE IF A HAVIS TRAK IS NOT BEING USED, OTHER HARDWARE MAY BE REQUIRED (SUPPLIED BY INSTALLER).
3. ATTACH CARD READER TO ASSEMBLY USING 2X, 1/4-20 X 1/2" HHCS, 1/4" FLAT WASHERS & 1/4-20 SERRATED NUTS

C-CSR-2 INSTALL INSTRUCTIONS

UT-101

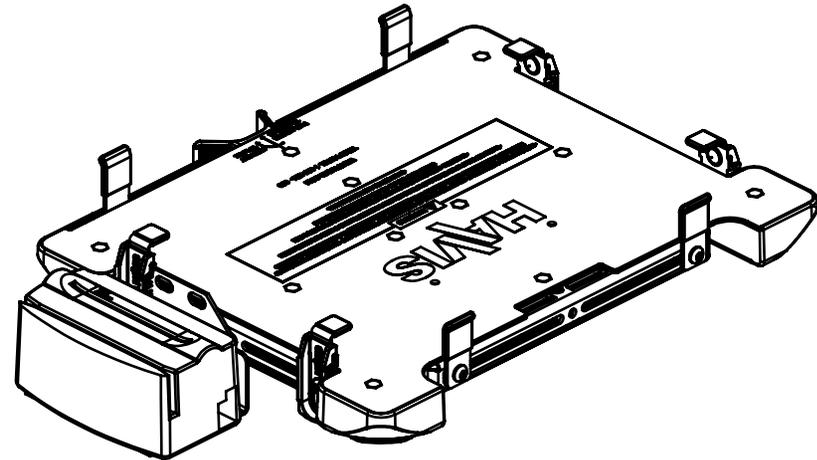

1. EXTEND UT-101 ASSEMBLY MOVING THE TWO HOLD DOWN TABS IF NECESSARY.
2. LOOSEN SIDE TAB AND REMOVE SCREW.
3. INSERT CARD READER BRACKET BETWEEN THE HOLD DOWN TAB AND SIDE SLOT, REATTACH THE SCREW.
4. ATTACH CHOSEN CARD READER TO BRACKET USING SUPPLIED HARDWARE IF APPLICABLE.