


# C-VS-1508-INSE INSTALLATION INSTRUCTIONS

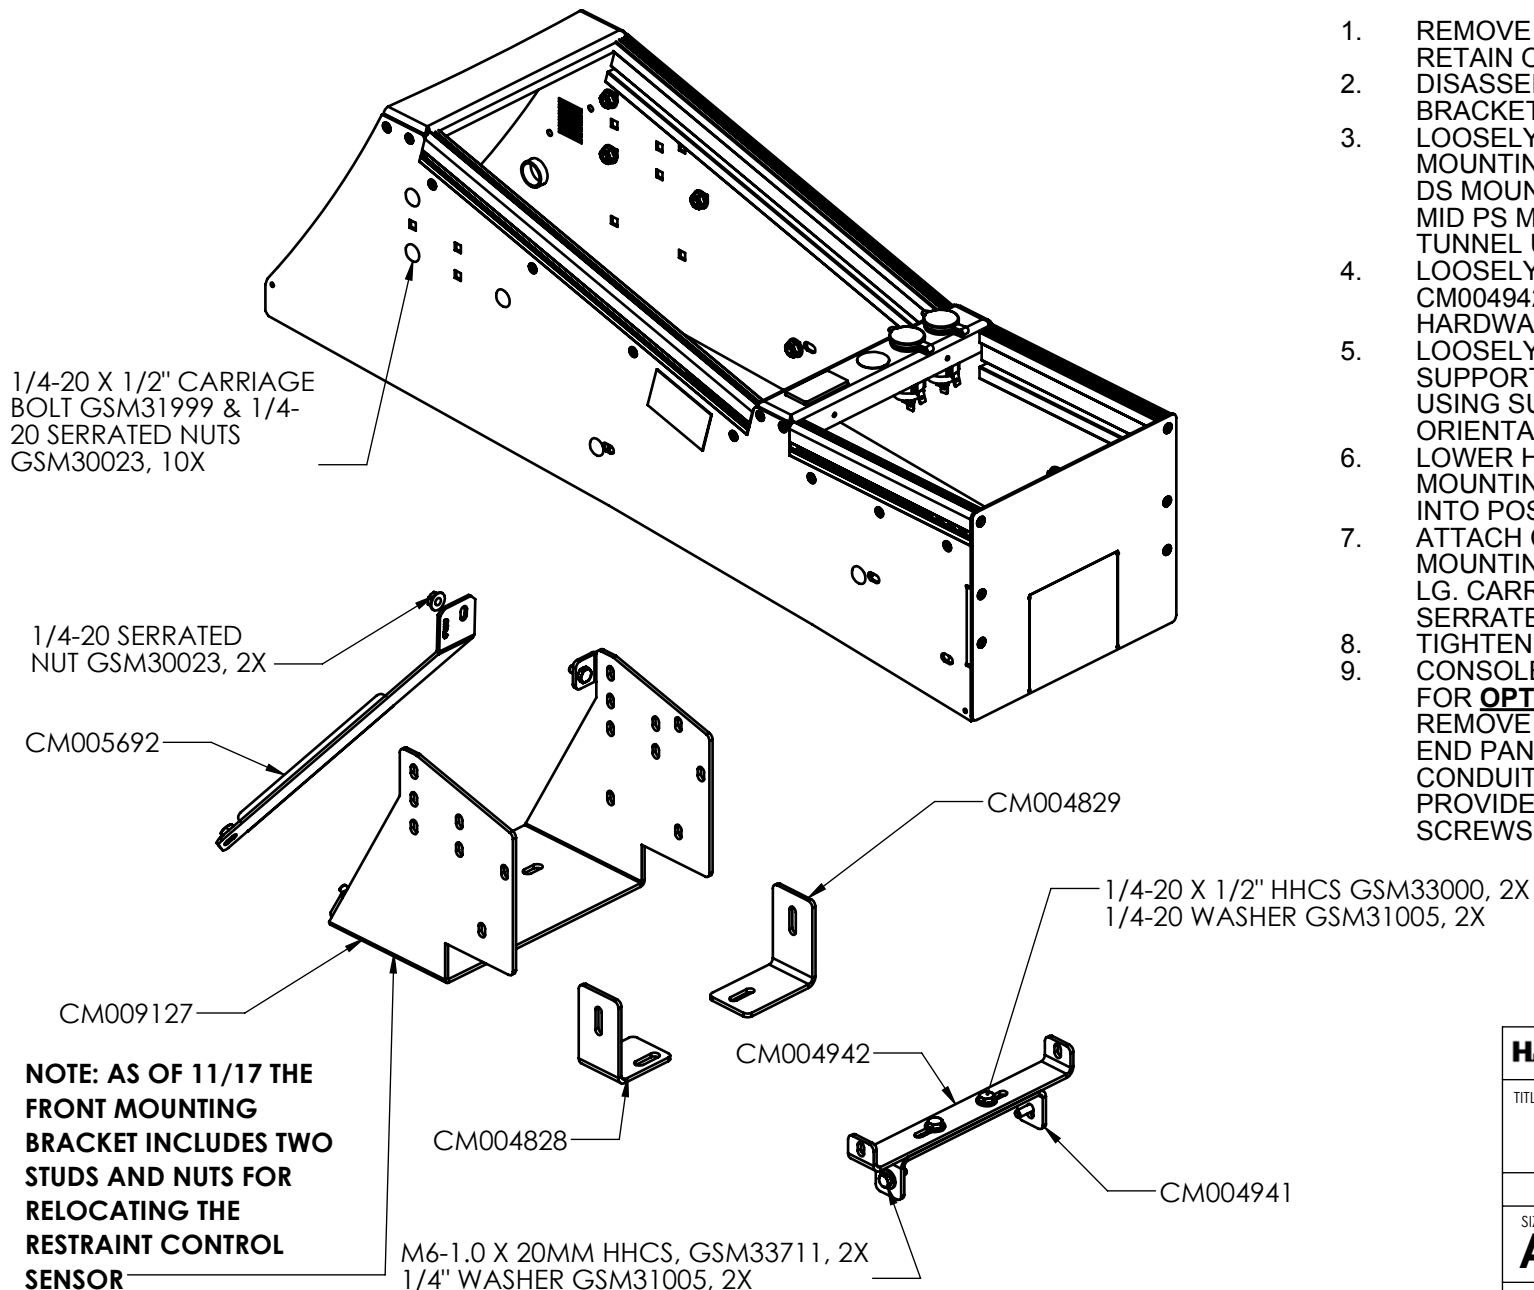

1. REMOVE OEM TUNNEL PLATE. RETAIN OEM HARDWARE.
2. DISASSEMBLE FRONT MOUNTING BRACKET CM009127 FROM CONSOLE.
3. LOOSELY ATTACH CM009127 FRONT MOUNTING BRACKET, CM004828 MID DS MOUNTING BRACKET & CM004829 MID PS MOUNTING BRACKET TO OEM TUNNEL USING OEM HARDWARE.
4. LOOSELY ATTACH CM004941 TO CM004942 USING SUPPLIED HARDWARE.
5. LOOSELY ATTACH CM005692 SUPPORT BRACKET TO CM009127 USING SUPPLIED HARDWARE IN THE ORIENTATION SHOWN.
6. LOWER HAVIS CONSOLE OVER MOUNTING BRACKETS AND SLIDE INTO POSITION.
7. ATTACH CONSOLE HOUSING TO MOUNTING BRACKETS WITH 1/4-1/2" LG. CARRIAGE BOLTS AND SERRATED NUTS.
8. TIGHTEN ALL HARDWARE.
9. CONSOLE INCLUDES PROVISIONS FOR **OPTIONAL** OEM REAR CONDUIT. REMOVE SQUARE KNOCKOUT FROM END PANEL, PLACE CONSOLE OVER CONDUIT, ATTACH WITH SPACERS PROVIDED AND OEM REAR BRACKET SCREWS.

<b>HAVIS</b> HAVIS, INC. <small>75 JACKSONVILLE RD. WARMINSTER, PA. 18974 1-800-524-9900</small>		
TITLE: C-VS-1508-INSE, INSTALLATION INSTRUCTIONS		
DO NOT SCALE DRAWING		
SIZE <b>A</b>	DWG. NO. C-VS-1508-INSE-INST	REV 10/18
SCALE: 1:16		SHEET 1 OF 1