

## INSTALL INSTRUCTIONS C-VSW-1300-TAH-2-PM

### 2015-2020 Chevy Tahoe Police Pursuit Vehicle (PPV)

### Vehicle Specific Console (12.5" inches wide)

### 13" inches of Equipment mounting space with mount for

### Brother Pocket Jet Printer mount

**TOOLS REQUIRED:**

Phillips Screw Driver	Standard Socket set	T-20 Torx Bit
Metric Socket set	Wire Cutters	Wire Crimping tool

**INSTALLATION PARTS AND MOUNTING HARDWARE:**

<u>QTY</u>	<u>DESCRIPTION</u>	<u>PART#</u>	
1	Main console housing		
1	Main console bracket	CM005911	(attached to console housing)
2	Floor brackets	CM006193	
1	Driver side trim panel	CM008217	
1	Passenger side trim panel	CM009195	
1	Top trim panel	CM006409	
1	Printer paper roll rod	CM008426	
1	Electrical accessory mounting plate	CM005915	
1	Rear end cap for hump bracket	CM006410	
1	Startech USB 90° extension cable	GSM70141	
2	1/2" Aluminum spacer (rear)	CM003200	} <b>C-HK-345</b>
2	3/4" Aluminum spacer (front)	CM003216	
1	7/8" Plug	CM86430	
8	#8 x 3/8 Torx head sheet metal screws	CM86508	
10	1/4" serrated nut	GSM30023	
2	8/32 Keps nut	GSM30027	
4	1/4" Flat washer	GSM31005	
4	7/16" Flat washer	GSM31011	
4	3/8" id x 1-5/8" od Fender washer	GSM31149	
8	1/4" x 3/4" Carriage bolt	GSM32000	
4	1/4" x 3/4" Hex bolt	GSM33001	
2	8/32 x 1/2" Phillips pan head machine screw	GSM33110	
4	3/8 x 1.75" Hex bolt (if floor mount location is not threaded)	GSM33303	
4	10mm x 45mm Hex bolt (if floor is already threaded)	GSM33733	

**Notes:** 1. This console was designed for the Police Pursuit Tahoe. However it can be installed into a Retail Tahoe or Suburban by removing the OEM center console. When the OEM console is removed, you must order the lower center trim panel from Chevy. Consoles will not fit properly without OEM lower center trim. Chevy part number for instrument panel lower center trim #22885554 (Color – Black)

**2. OEM #22885554 was changed to #84565261 in 2019.**


3. The C-VSW-1300-TAH-2-PM console provides mounting for the OEM Aux module, 12 volt and 110 volt sockets, but it does **NOT** have provisions for relocating the controls from the rear end of the OEM console.

**Always!**

- Read all instructions before installing any Havis, Inc. products.
- Use hardware provided with install kit

**C-VSW-1300-TAH-2-PM  
(Assembly)**

Havis, Inc.  
75 Jacksonville Road  
Warminster, PA 18974  
T 800-524-9900 F 215-957-0729  
www.havis.com

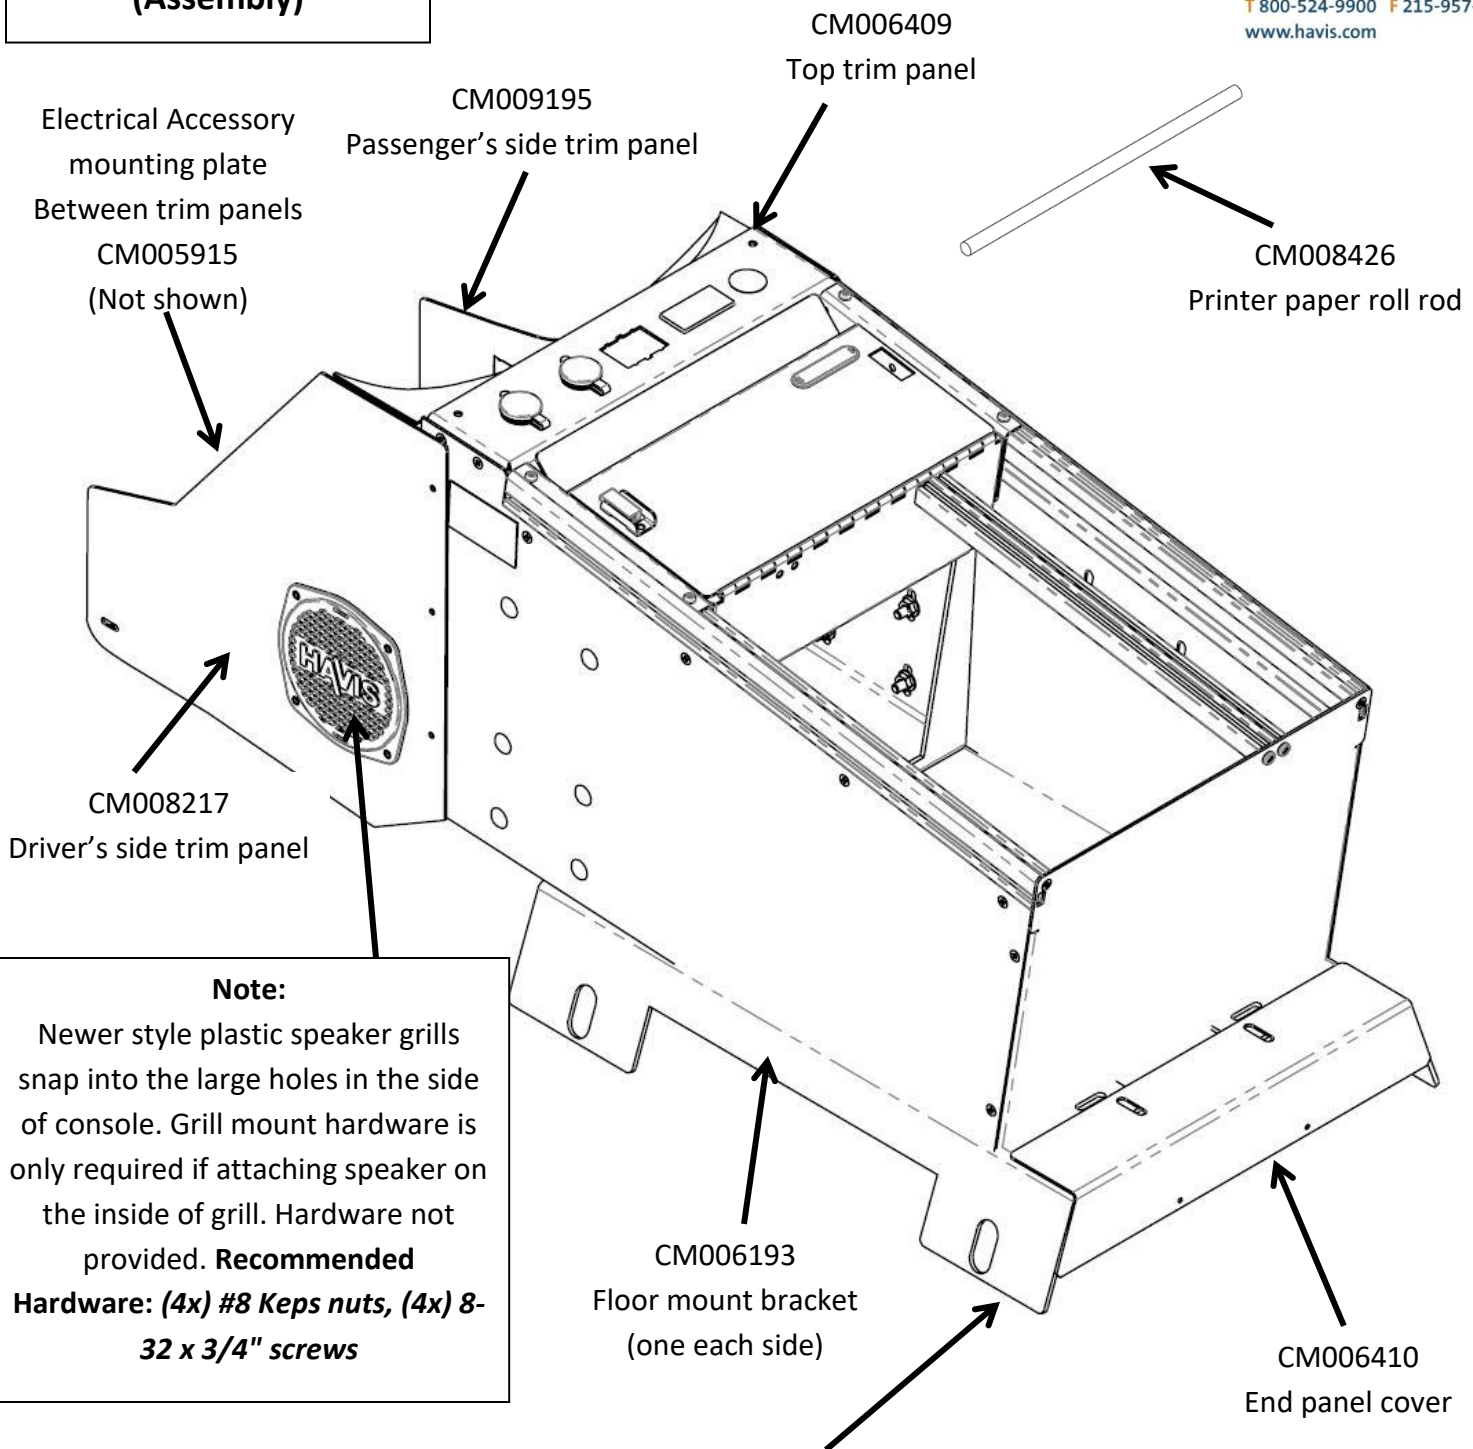

**IMPORTANT NOTE:**

Install CM006193 floor brackets to existing OEM mount points as follows.  
Between bracket and hump, use 1/2" spacers at rear and 3/4" spacers at front.

**RE: Police Pursuit Vehicle without center seat or OEM console**

Use 3/8" x 1.75" self-threading bolts and 3/8" fender washers and spacers

**RE: Retail Tahoe or PPV (code A95) with OEM center console or PPV with center seat**

Remove console or seat and use 10mm x 45mm bolts and 3/8" fender washers and spacers

Photos show the new speaker vents in the side trim panels. It is up to the installer to determine if a speaker or other device can be mounted behind these vents for their specific application.



View of Tahoe transmission hump between front seats



Install CM006193 hump brackets to existing OEM mount points. Use 10mm x 45mm bolts and 3/8" flat washers (Retail Tahoe) Or 3/8" x 1.75" self-threading bolts and washers for (Police Package) Between bracket and hump, use 1/2" spacers at rear and 3/4" spacers at front.



**For ease of installation, remove the printer mount and accessory pocket from the console.**

Place main console housing on floor brackets and loosely attach with eight (8) 1/4 x 3/4 carriage bolts and serrated nuts.

**Note:** Bolts come up through bottom. (Nuts on top)



Loosely attach top trim panel (CM006409) to the underside of the console housing with 8/32 x 1/2" machine screws and Keps nuts. Install OEM aux panel.




Re-install accessory pocket into the console.



Re-install printer mount back into console.



Slide the electrical accessory mounting plate (CM005915) in through the side and into place. (forward mount tabs face down)

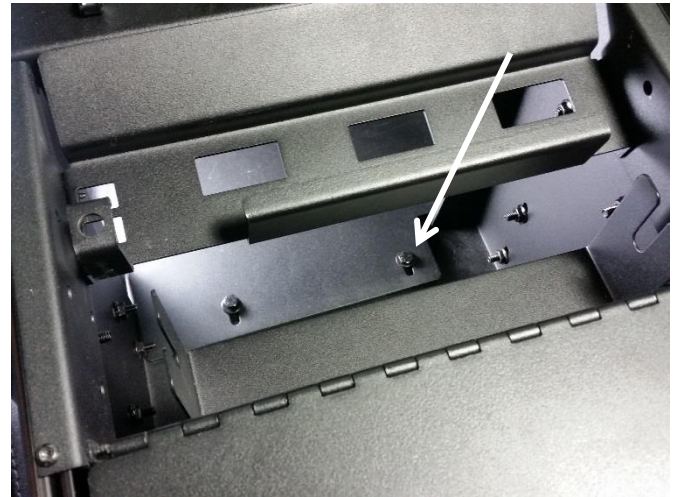

Loosely attach the electrical accessory mounting plate to the console "U" bracket with 1/4" x 3/4" Hex bolts and washers.




Attach driver side trim panel to console with four (4) #8 x 3/8 Torx head sheet metal screws.



Attach passenger side trim panel to console with four (4) #8 x 3/8 Torx head sheet metal screws.



Install 12 volt and OEM 120 volt sockets in side panel if desired.  
**Note:** This photo shows the OEM 120 volt socket mounted in the side trim. OEM wire ties and tape may need to be cut in order to have enough wire to extend to this location. Splicing four (4) wire extensions may also be required. **Wire and eight (8) butt connectors for extensions must be supplied by the installer.**

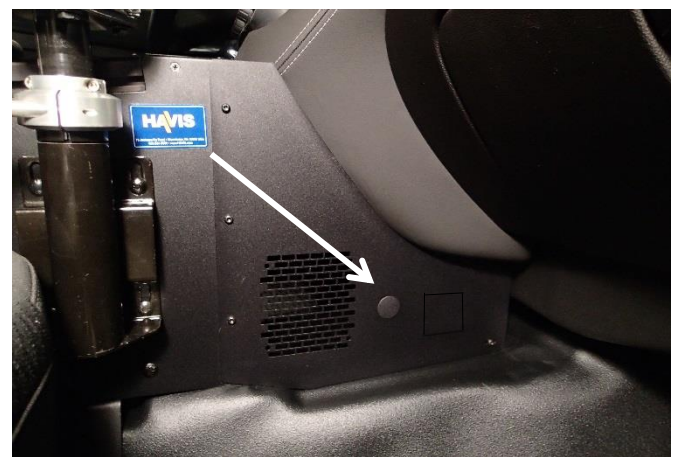

Install 7/8 plug and small cover plate in side panel if 12 volt socket is not used.



Pull USB and power cable connections through openings at the left of the printer mount bracket. Plug them into their respective locations and install printer into the mount.



Install the rod (CM008426) through the paper pool and place into the console. Feed paper into the printer.



Close lid and confirm final operation, fit, and finish. Install control heads and accessories.



Installation is now complete.



Slide motion device out of the way to load paper.



View of DS-DELL-602, C-MD-112, ADP-110, C-UMM-101, KBM-201, KB-101, C-ARM-102 and C-CUP2-I-A06.