

INSTALLATION INSTRUCTIONS:

Note:
 -Docking station depicted may not match Identically to product purchased. However, all Installation instructions are still applicable unless otherwise noted.

-Bracket can be mounted on either side of docking station.
 -Bracket can be mounted on same side as LPS-204 (Accessory Power Supply Mounting Bracket - not shown). Substitute (Pan Head, 1/4" - 20 x 5/8" long) if mounting on same side as LPS-204.

1. To install card reader bracket, position bracket as shown in image at left and align mounting holes (qty:2) with holes (qty:2) on side of docking station's mounting bracket.

2. Insert machine screws (pan head, 1/4"-20 x 3/8" long) into holes and fasten card reader bracket & docking station mounting bracket to DS-PAN-420 Series docking station. Torque screws to 80 in.-lbs. with a philips head #3 driver.

3. Plug cabling (supplied with E-seek Model M250/260) into card reader and position card reader such that cabling is directed towards the rear of the docking station.



4. Align card reader over card reader mounting bracket as shown. Using the indicated drive type/size, secure the card reader to the bracket with the two #4-40 X 1/4" long screws (Item #1) and torque to 8.0 in.-lbs (0.9 Nm) +- 10%.

Note:
 -For right hand installation of M250 card reader, use the inner set of holes on the card reader bracket for mounting. For left hand installation of M250 card reader (optional), use the outer set of holes. Use the center set of holes when mounting the M260 card reader to either the right or left side.

5. Plug the card reader cabling into the appropriate docking station port(s) and be sure to properly strain relieve the cables with supplied zip ties (Item #2).

D
C
B
A

D
C
B
A

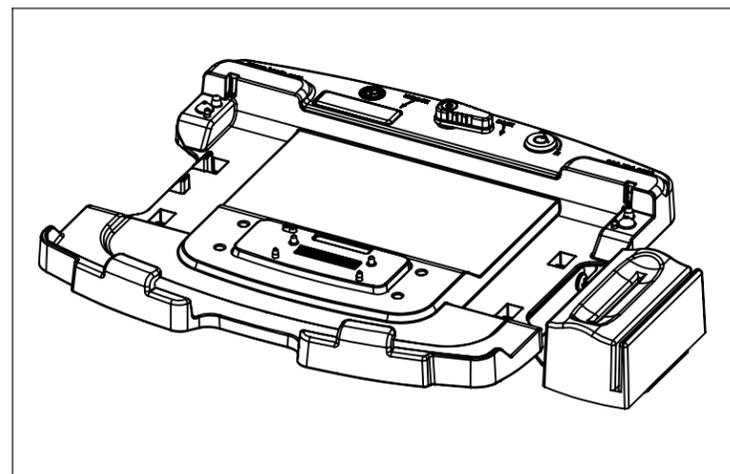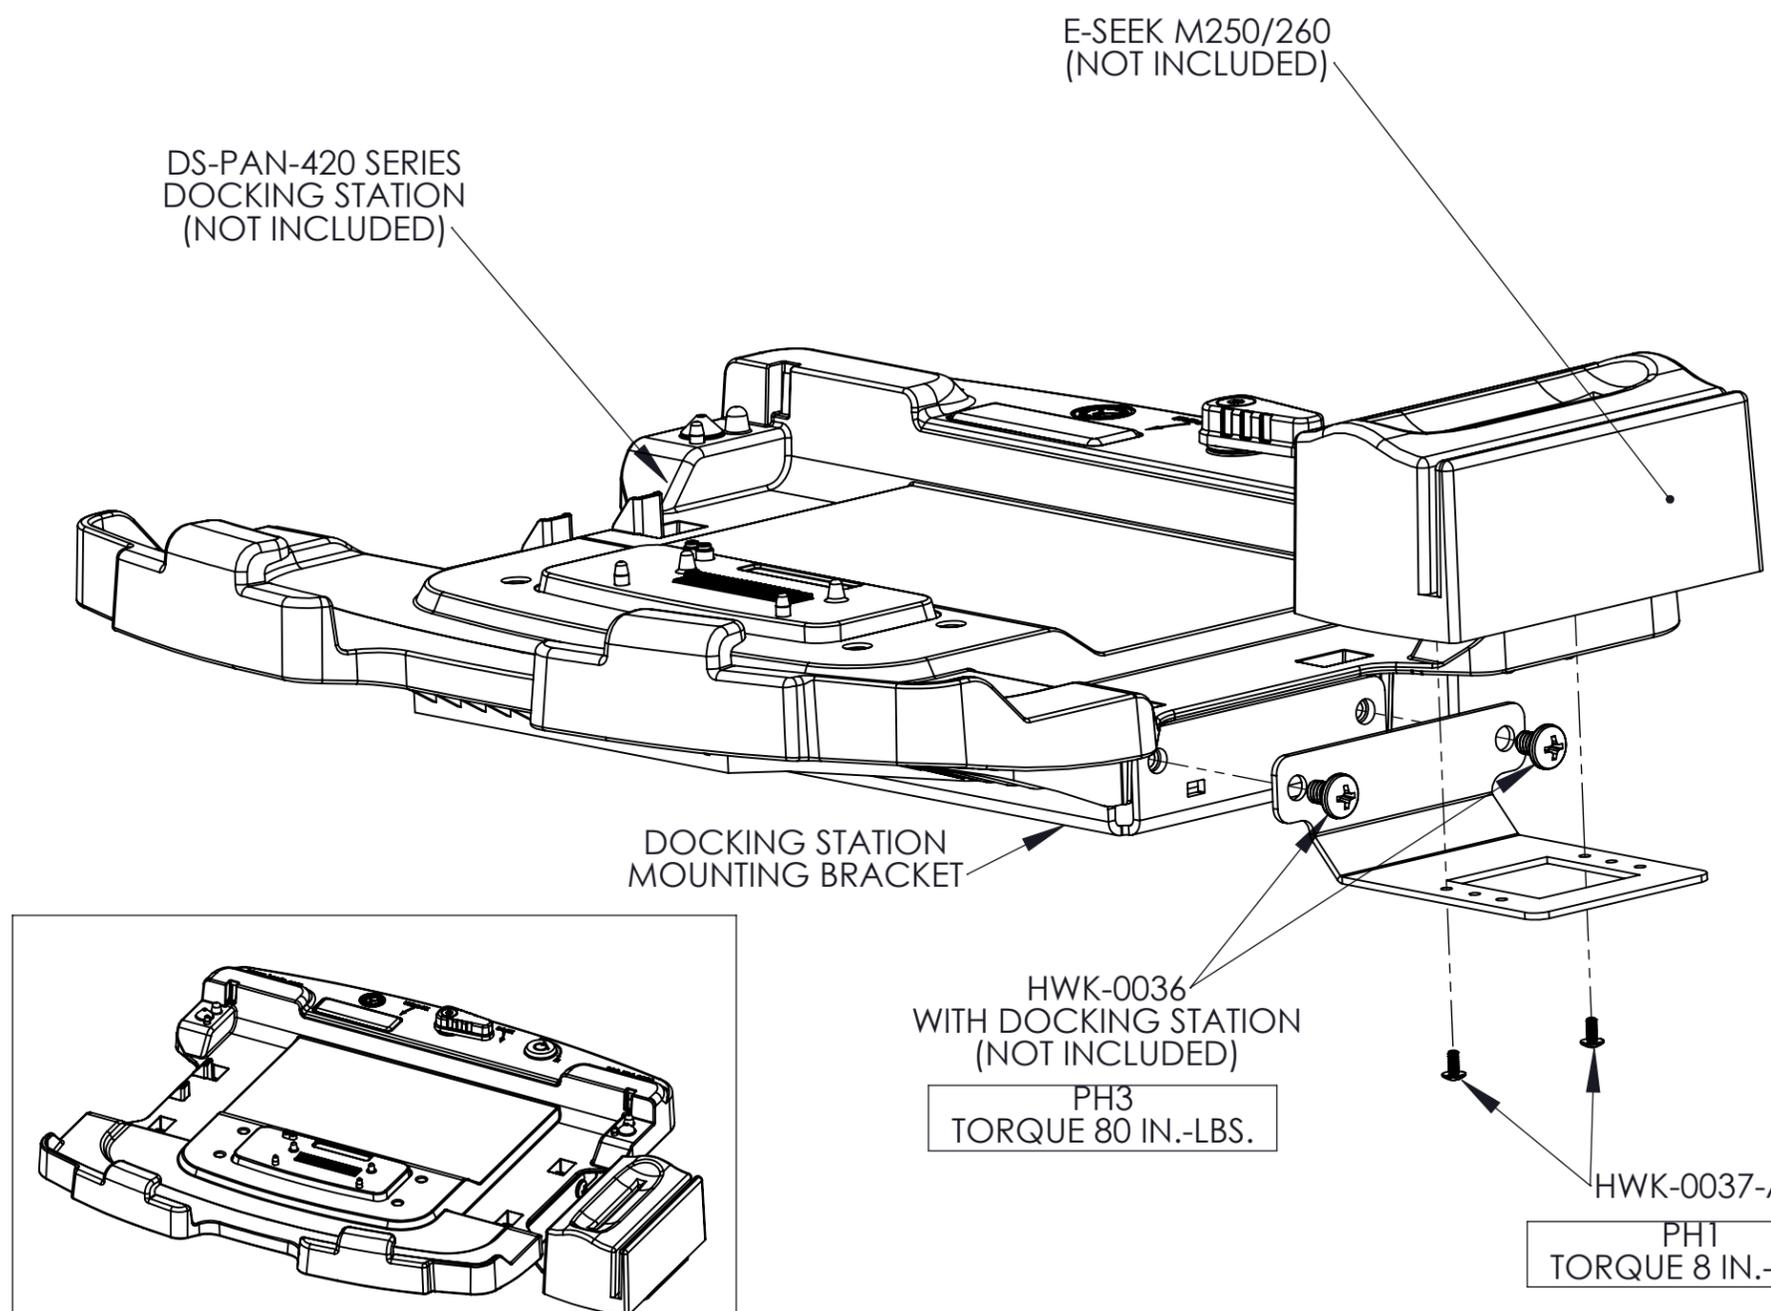

DOCKING STATION WITH CARD READER

(HWK-0037-A) HARDWARE KIT CONTENTS				
ITEM #	DESCRIPTION	QTY.	FINISH	DRIVE STYLE/SIZE
1	4-40 X 1/4" LONG, TRUSS HEAD MACHINE SCREW	3	W\PATCH	PH1
2	ZIP TIE, 0.09" W X 0.03" T X 4.0" L, 18# TENSILE	2	PLAIN	

PRODUCT I.D.	DATE
DS-DA-226	05-15-15

PRODUCT NAME
CARD READER BRACKET FOR DS-PAN-420 SERIES

HAVIS
 1-800-524-9900
 WWW.HAVIS.COM

WEIGHT: (LBS)
 REV. DATE
 05-15-15

**DRAWING NUMBER:
 DS-DA-226_INST_5-15**

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

PRODUCT DESCRIPTION
 CARD READER MOUNTING BRACKET FOR THE E-SEEK MODEL M250/260. COMPATIBLE WITH DS-PAN-420 SERIES DOCKING STATIONS.