


INSTALLATION INSTRUCTIONS:

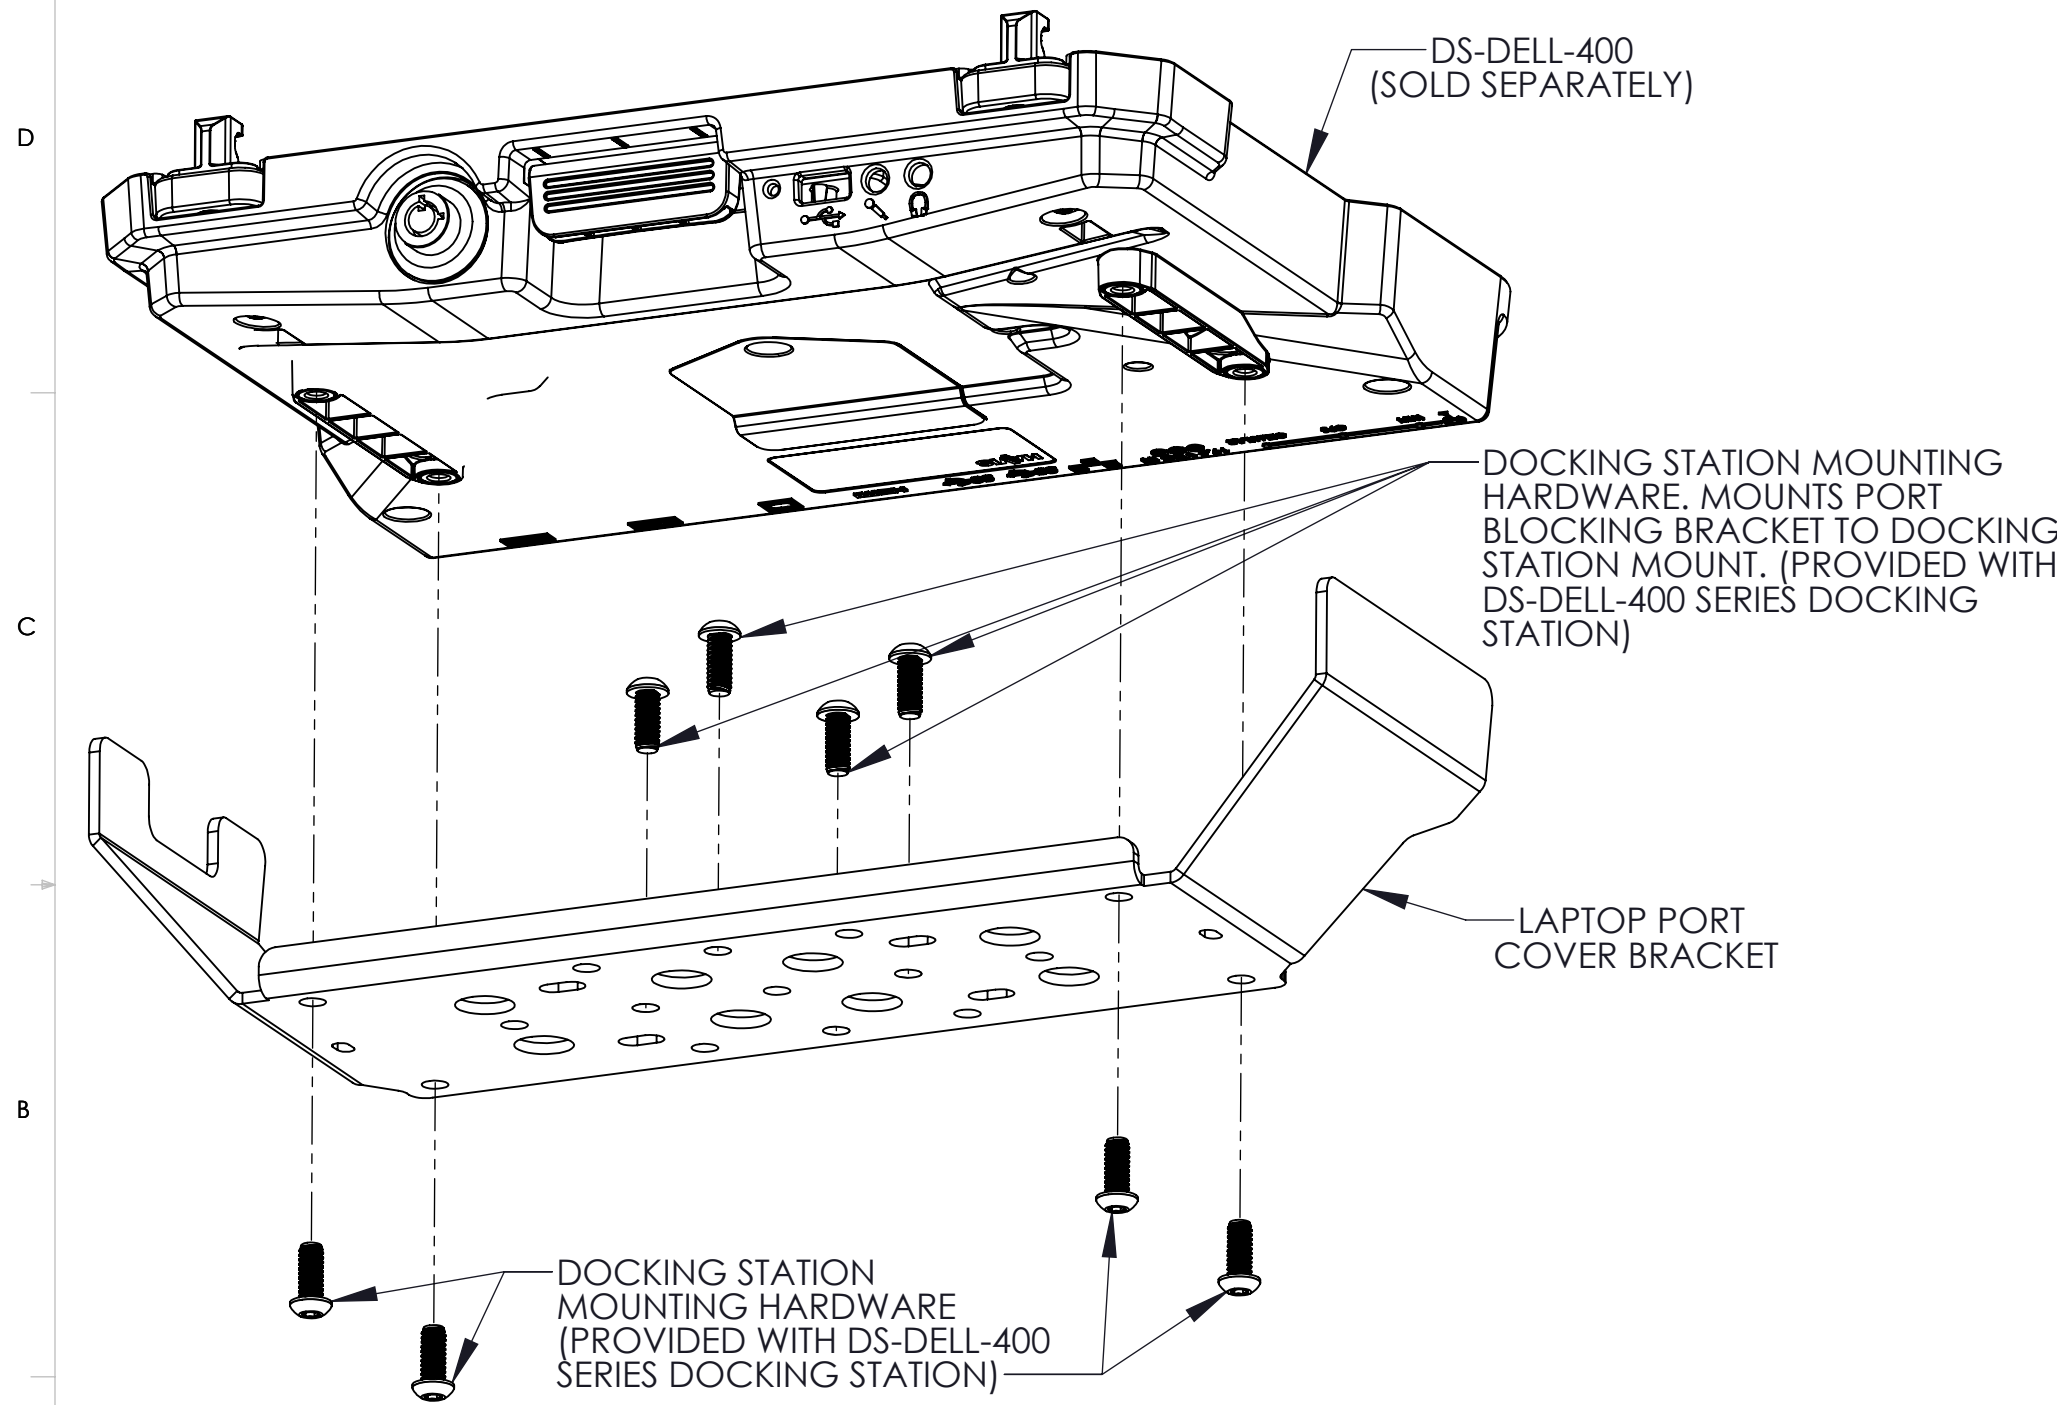

NOTE:
 -DOCKING STATION DEPICTED MAY NOT MATCH IDENTICALLY TO PRODUCT PURCHASED. HOWEVER, ALL INSTALLATION INSTRUCTIONS ARE STILL APPLICABLE UNLESS OTHERWISE NOTED.

1. REMOVE ORIGINAL MOUNTING BRACKET FROM THE DS-DELL-400 SERIES DOCKING STATION AND THE MOUNT. ENSURE ALL HARDWARE IS KEPT AS IT WILL BE USED IN MOUNTING THE PORT BLOCKING BRACKET.

2. MOUNT THE PORT BLOCKING BRACKET TO THE DOCKING STATION MOUNT. USING QTY:4 OF THE 1/4-20x5/8" SCREWS. TIGHTEN WITH A 5/32" HEX DRIVE, TORQUE TO 80 in-lbs. (9.0Nm) ± 10%.


3. LOWER DOCKING STATION TO THE PORT BLOCKING MOUNTING BRACKET AS SHOWN AND SECURE WITH (QTY:4) 1/4-20x5/8" LONG SCREWS. TIGHTEN WITH A 5/32" HEX DRIVE, TORQUE TO 80 in-lbs (9.0Nm) ± 10%.

4. PROPERLY STRAIN RELIEVE ALL CABLES AS SHOWN IN DS-DELL-400 SERIES OWNER'S MANUAL.

**DRAWING NUMBER:
 DS-DA-234_INST_12-16**

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

PRODUCT DESCRIPTION
 LAPTOP PORT BLOCKING BRACKET FOR DS-DELL-400 SERIES DOCKING STATION

PRODUCT I.D. DS-DA-234	DATE 12-20-16
PRODUCT NAME LAPTOP PORT BLOCKING BRACKET	
 1-800-524-9900 WWW.HAVIS.COM	WEIGHT: (LBS) 7.05
	REV. DATE 12-20-16