

INSTALLATION INSTRUCTIONS

SBX-5009, SBX-5009-PROKIT Standalone mounting base for SBX-1000 series Drawers in 2011-2020 Dodge Durango w/Pro-Gard rear partition

TOOLS REQUIRED:

Standard socket set

Standard wrench set

PARTS and MOUNTING HARDWARE:

SBX-5009

<u>QTY</u>	<u>DESCRIPTION</u>	<u>PART#</u>
1	Mounting base	13288
2	Mounting riser	24476
1	Filler panel	13317
4	#8 x 3/8" Screw	13405
8	5/16" Hex nut	15999
4	M12 x 1.75" Hex nut	16107
8	5/16" Flat washer	16123
6	1/2" Flat washer	16126
8	5/16" Split lock washer	16143
6	1/2" Split lock washer	16145
4	5/16" Thread forming screw	16245
2	M12 x 1.75 Bolt	16524


SBX-5009-PROKIT

<u>QTY</u>	<u>DESCRIPTION</u>	<u>PART#</u>
1	Lower partition support	22958
2	Seat brace support brackets	22959
2	Partition support brace	24477
18	5/16" Serrated nuts	16014
4	5/16" Flat washer	16123
14	5/16" Carriage bolt	16244
4	5/16" x 1" Bolt	16336

Always!

- Read all instructions before installing any Havis, Inc. products.
- **Check for obstructions (Wires, brake lines, fuel tank, etc.) before drilling any holes!**
 - Use hardware provided with install kit

SBX-5009 &
SBX-5009-PROKIT

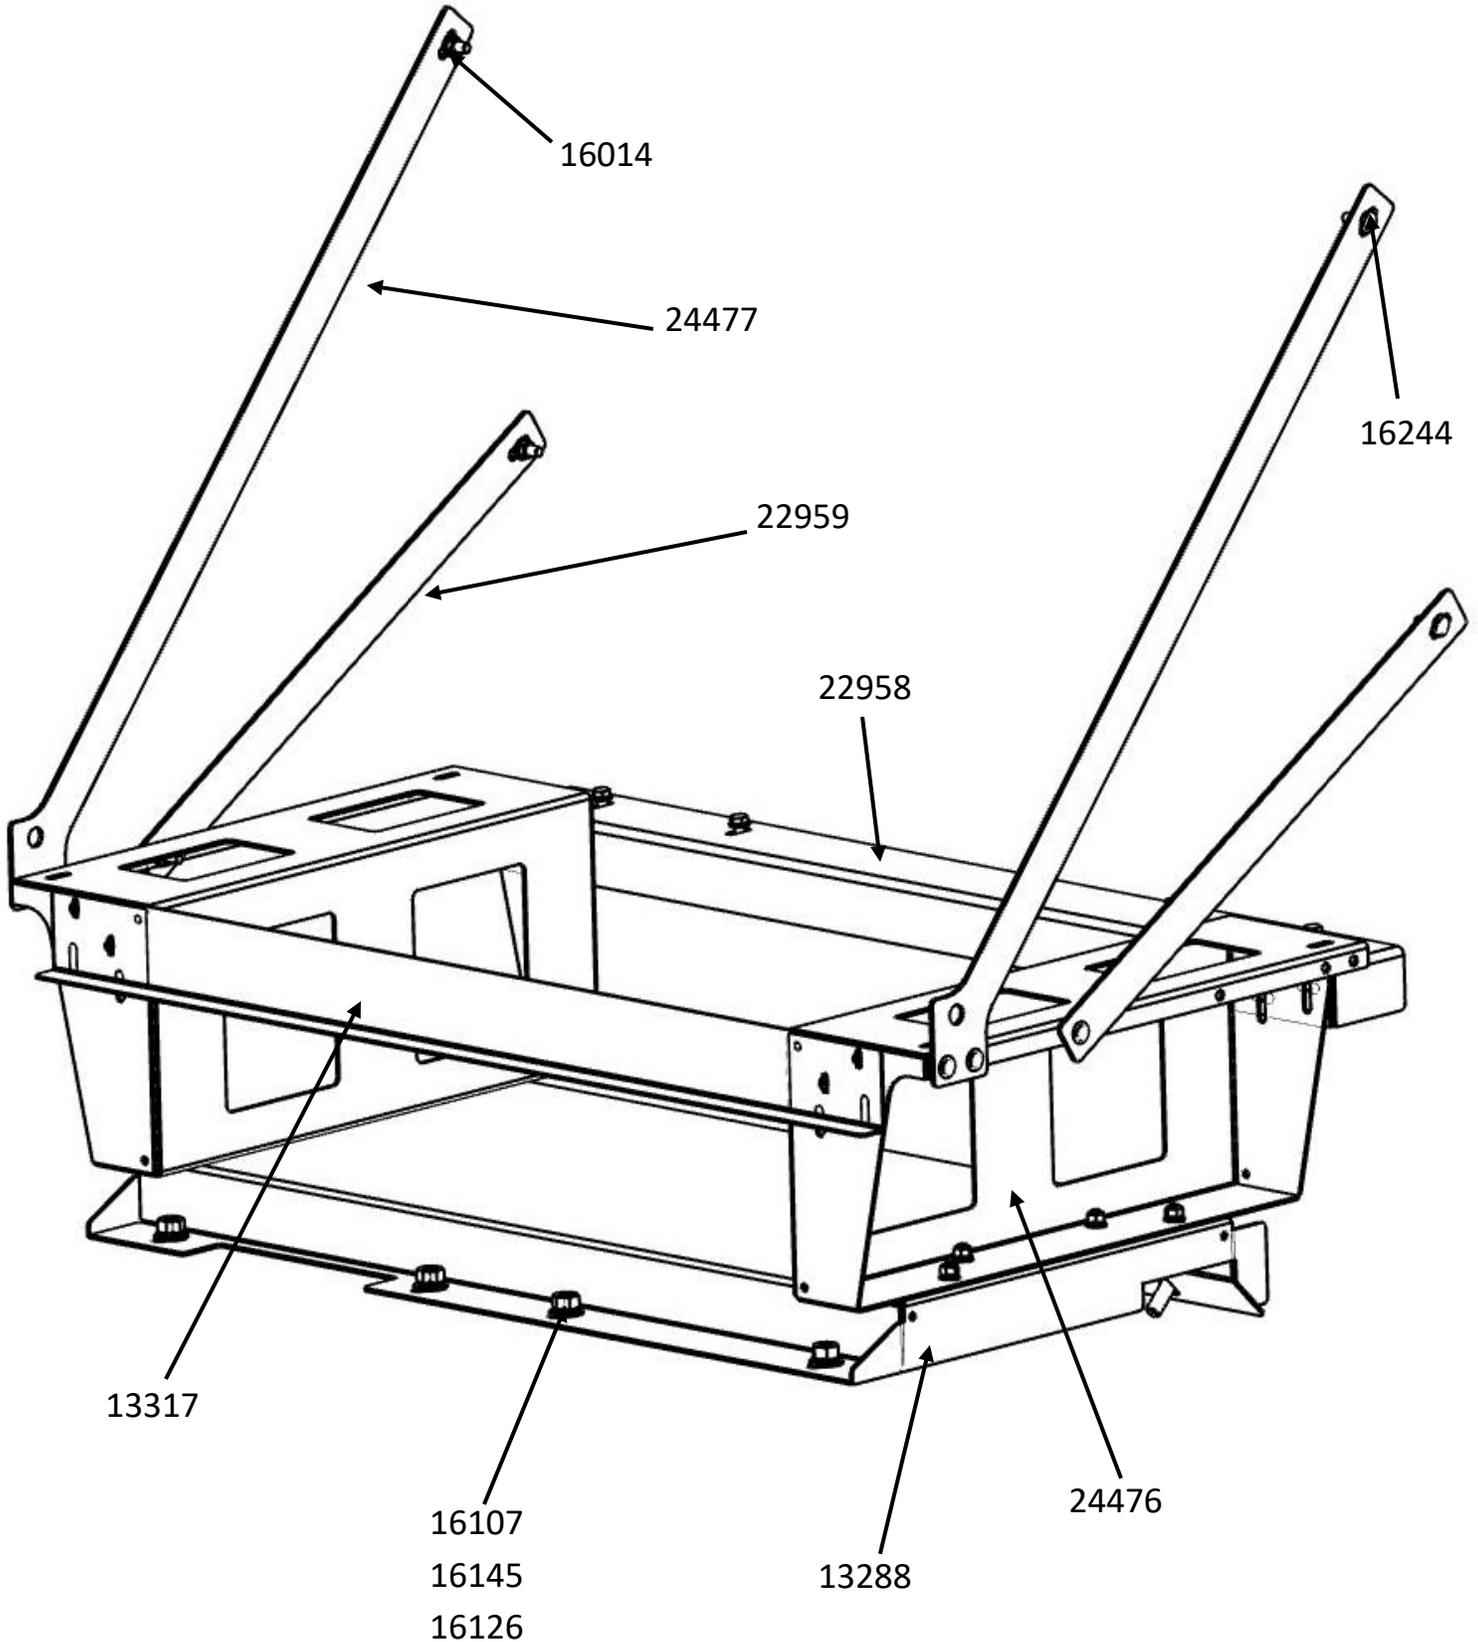



View of Durango trunk before installation



Flip down rear seats, unstrap forward storage pocket covers, and forward trim.




Remove rear storage cover, this unsnaps from the base.



Locate and remove (2) Phillips head screws from forward storage area.
(1 each side)



Remove forward storage pockets from vehicle.
These will not be reused.

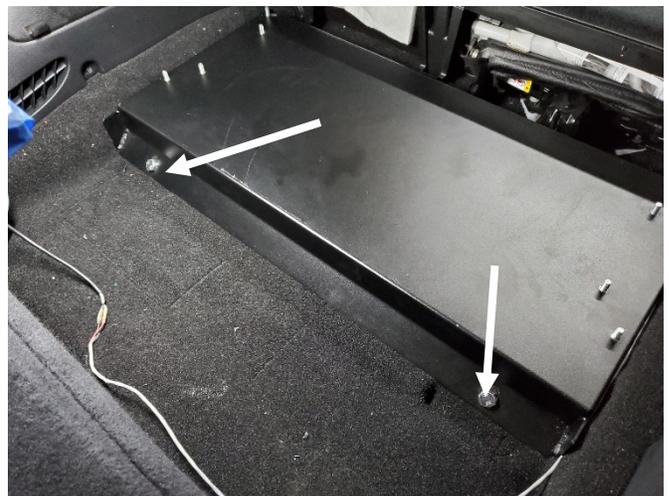

Insert mounting base and attach to OEM holes using (2) M12 x 1.75" bolts, washers, and split lock washers.
If relocating or adding equipment to the tray, do so at this time.




Attach the rear of the mounting base to the floor studs using (4) M12 nuts, split lock washers, and flat washers.




Attach mounting risers to SBX corner extrusions using four (4) 5/16" x 3/4" thread forming screws.



If using the PROKIT, attach the lower partition support using (4) 5/16" carriage bolts and serrated nuts.

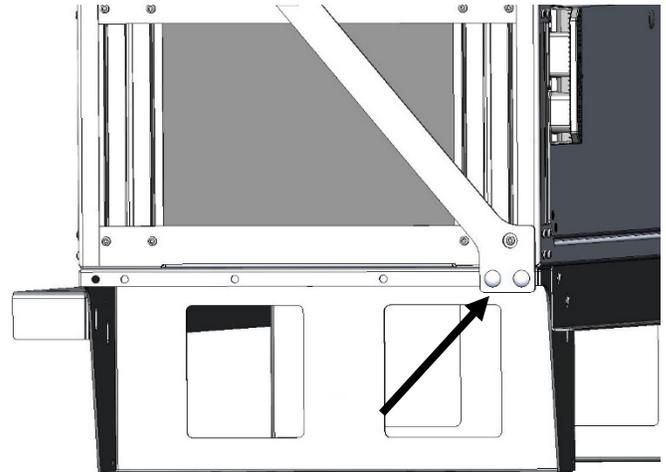

If using the PROKIT, attach the partition support brace using (2) 5/16" carriage bolts and serrated nuts. Repeat for other side.

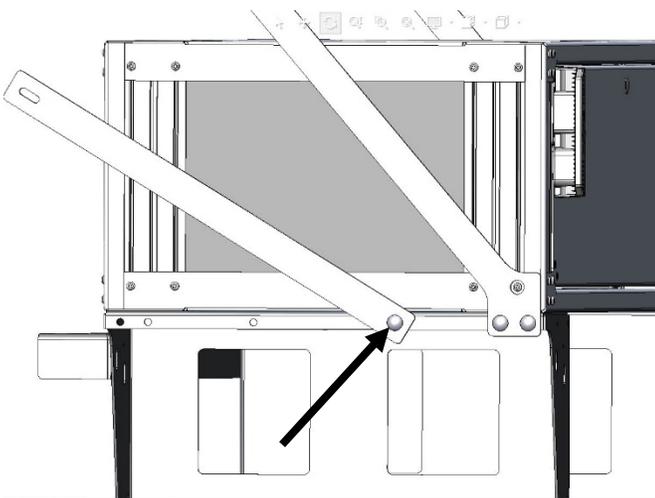

If adding prisoner seat with outboard seat belts, the seat brace support brackets must be attached. These will attach to the main weldment for the Durango OSB system.



Place the assembly into the vehicle and place on mounting base. Sliding in through the side doors and onto the back seat first, then on the base works well.



Place SBX with risers attached into the back of the Durango onto the mounting base. Line up to the studs in the base and attach using 5/16" nuts, split lock washers, and flat washers.




Lay rear partition in vehicle on back seats and lift onto partition support brace.



Attach partition to support brace using 5/16" x 1" bolt, lock washers, flat washers, and serrated nuts. If using the OSB system, attach brace and support arms at this time.



Attach rear filler panel to risers using six (6) #8 x 3/8" screws.

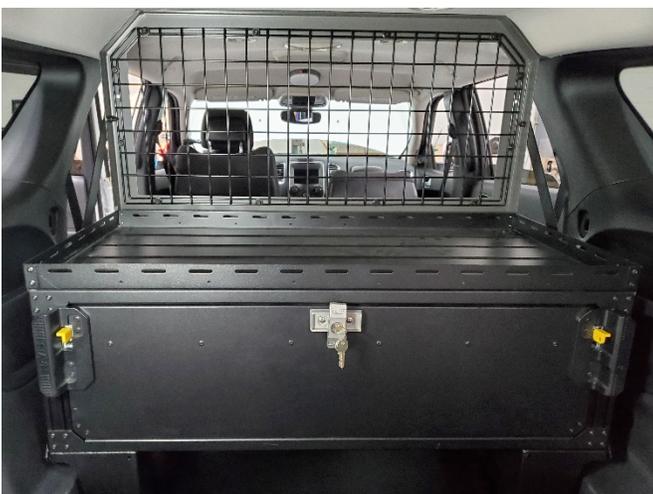

Confirm all hardware is tight.



Installation is now complete