
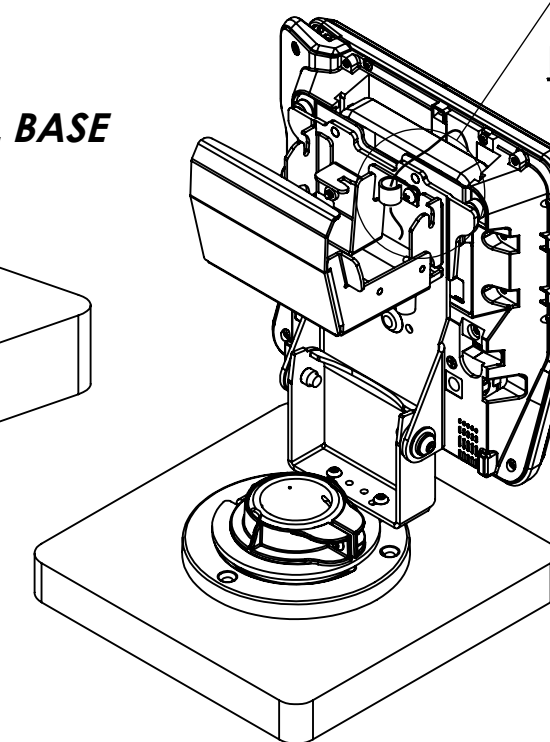
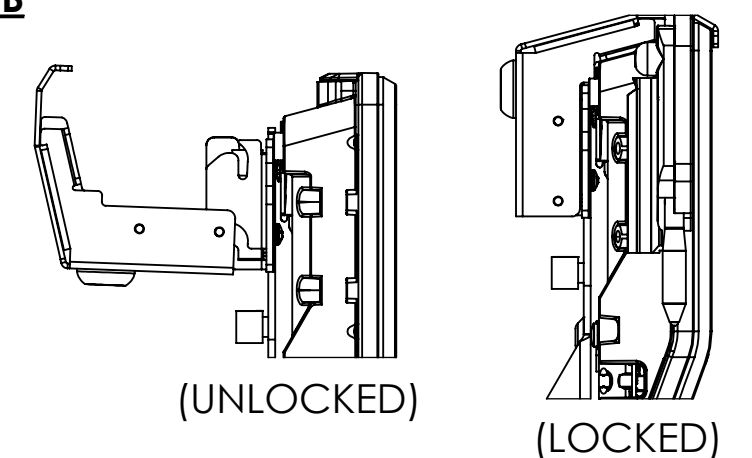
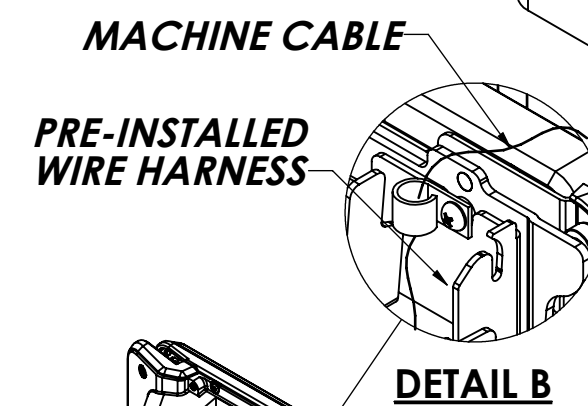
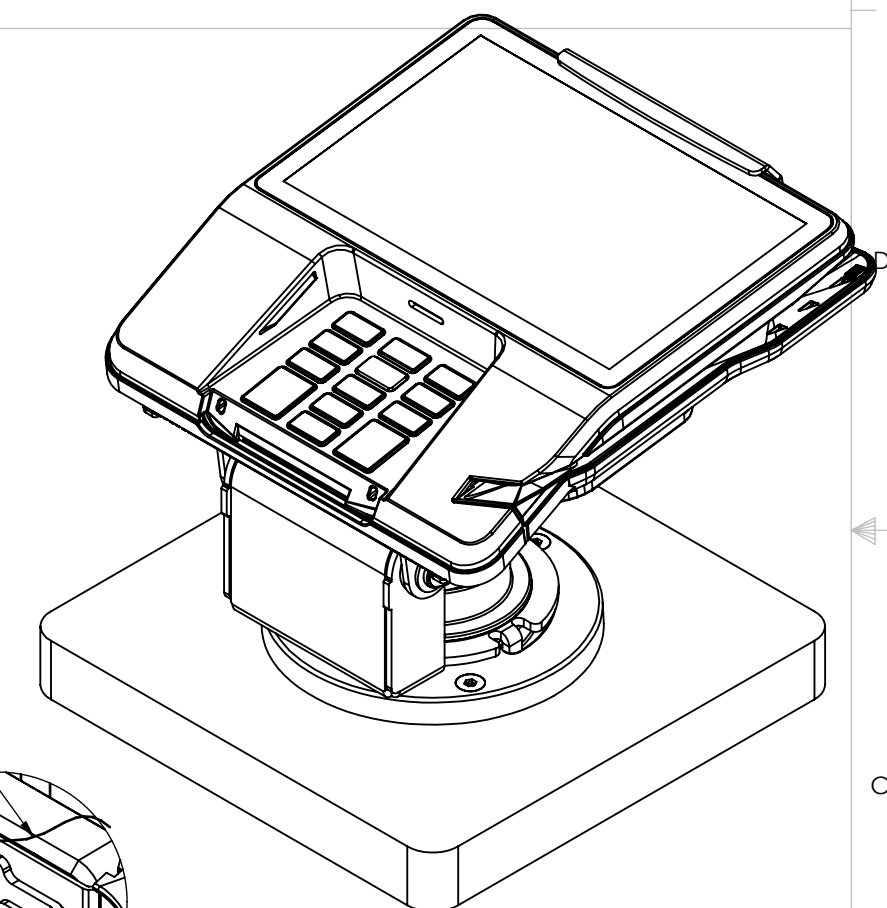
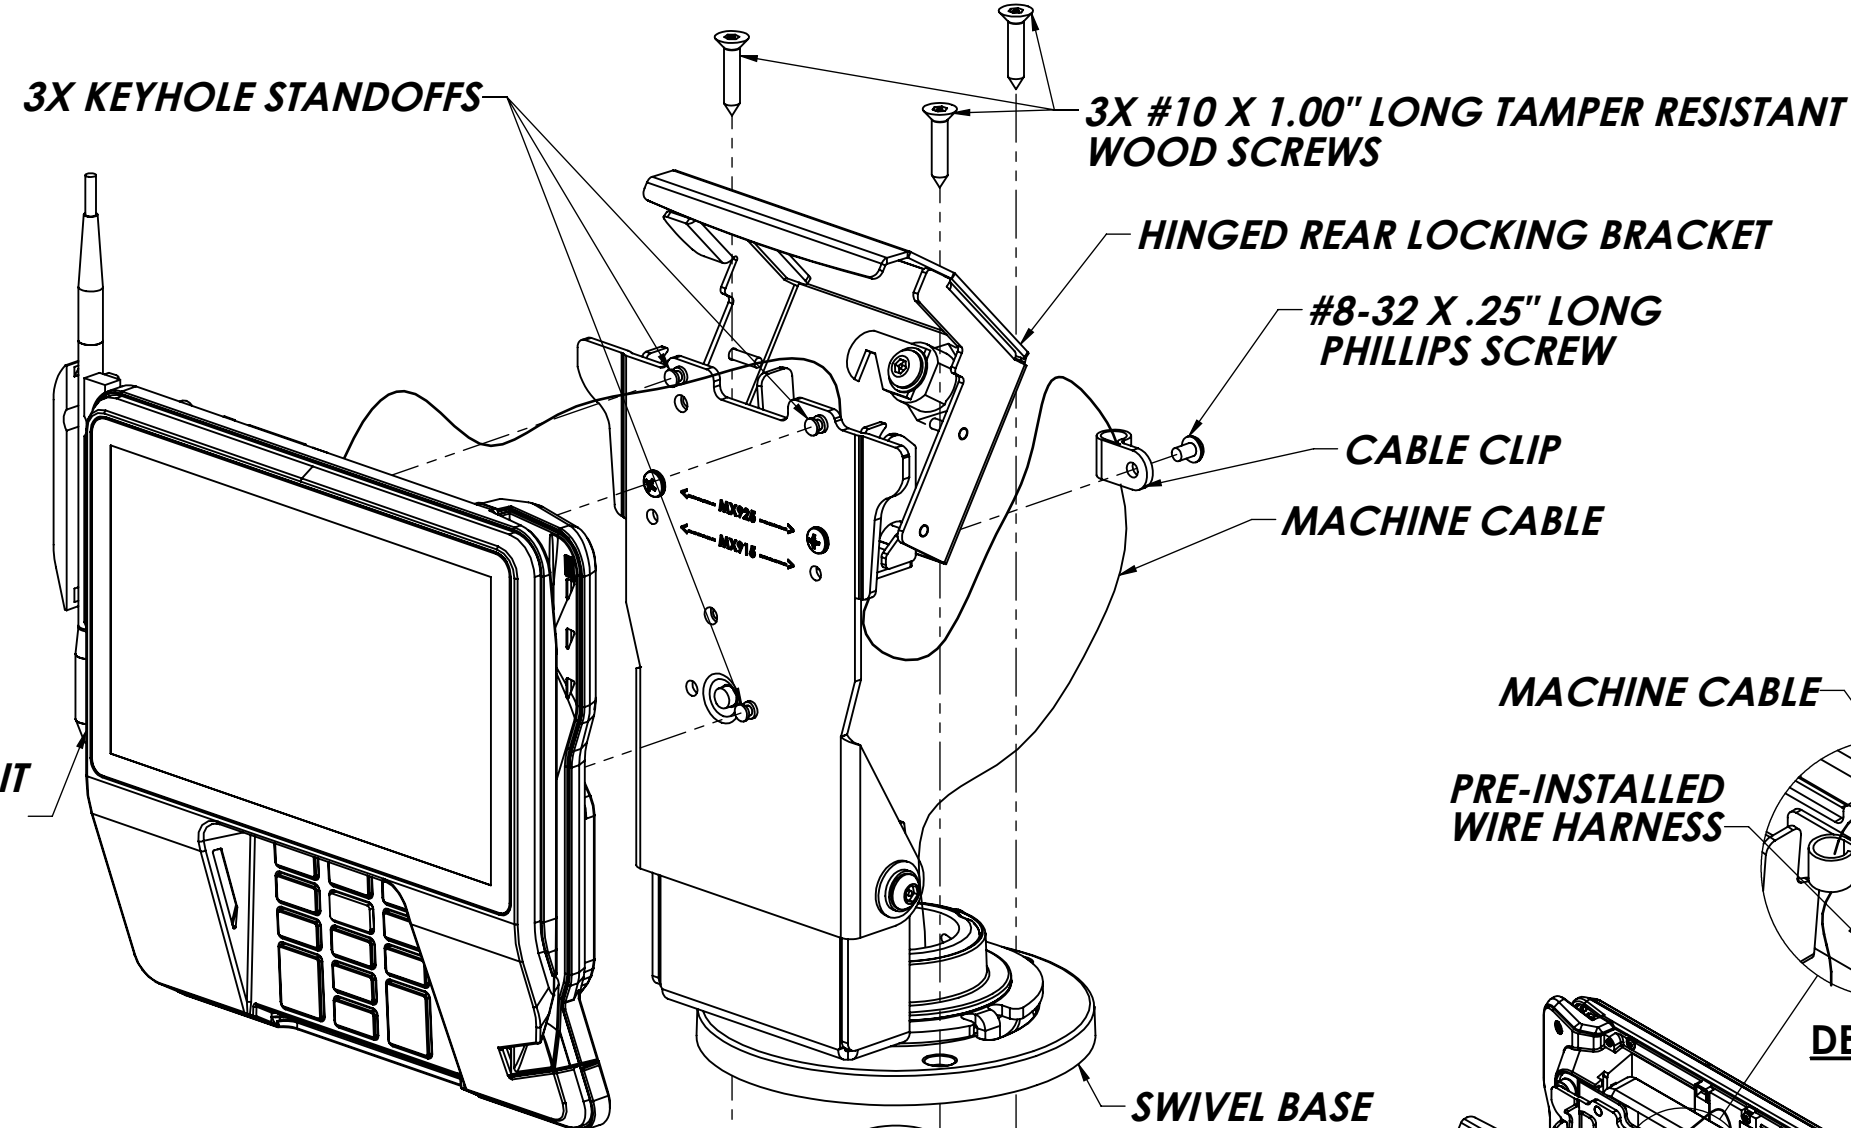
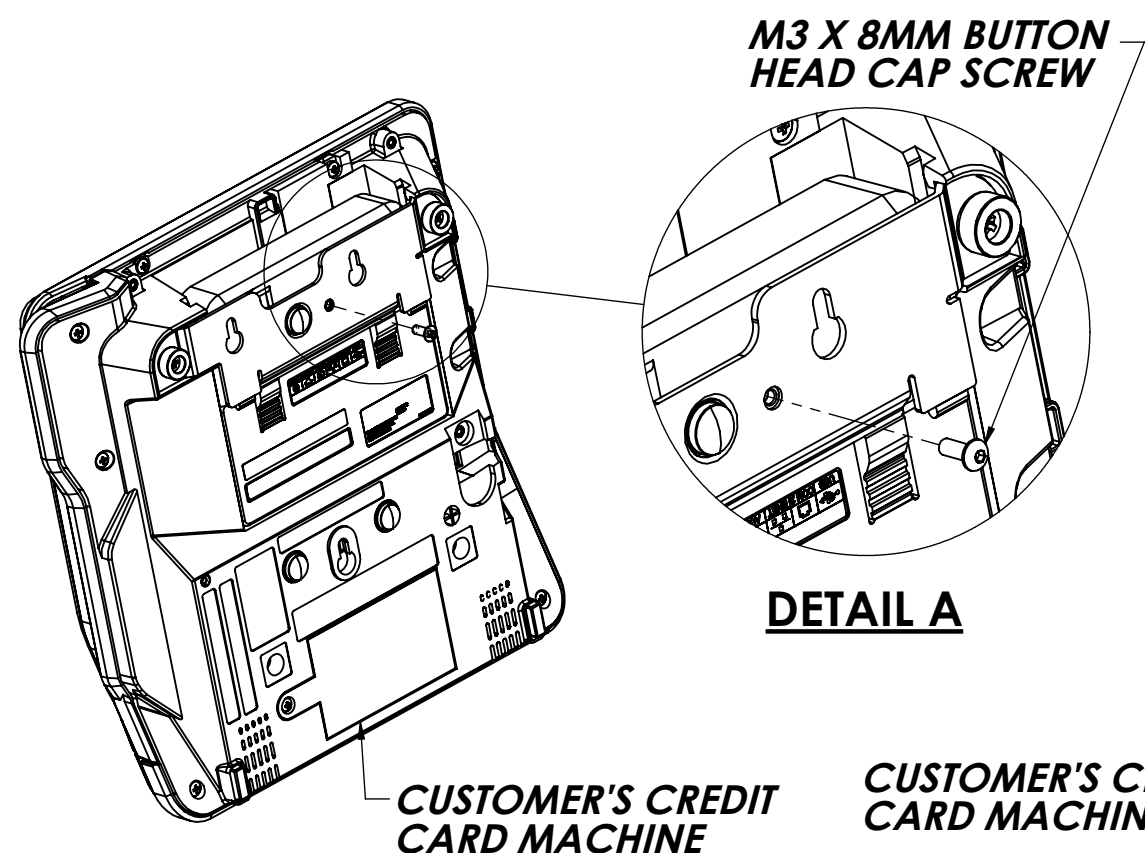
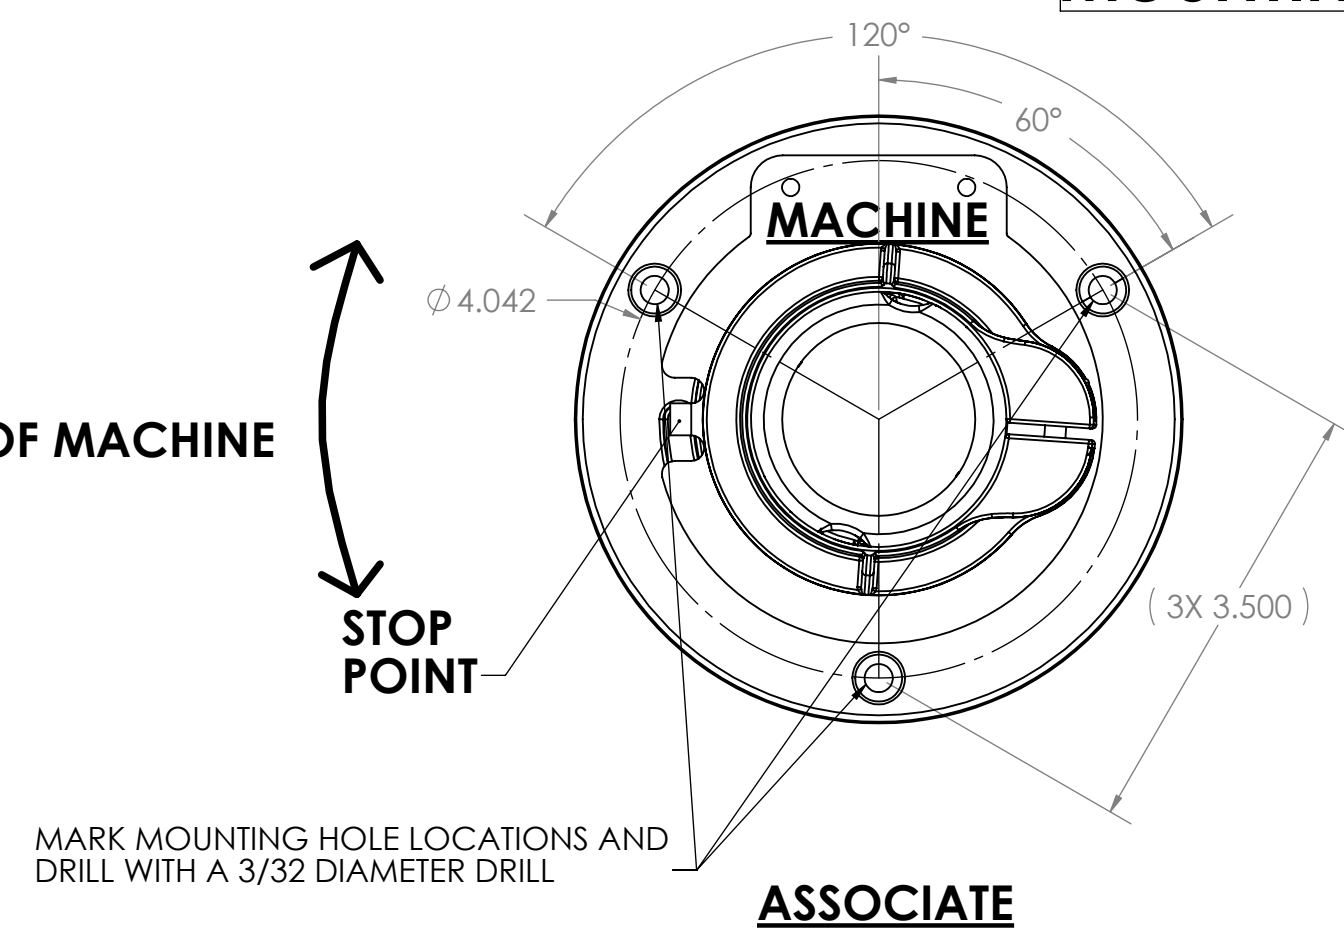


MOUNTING OPTION #1

CUSTOMER MOUNTING OPTION #2

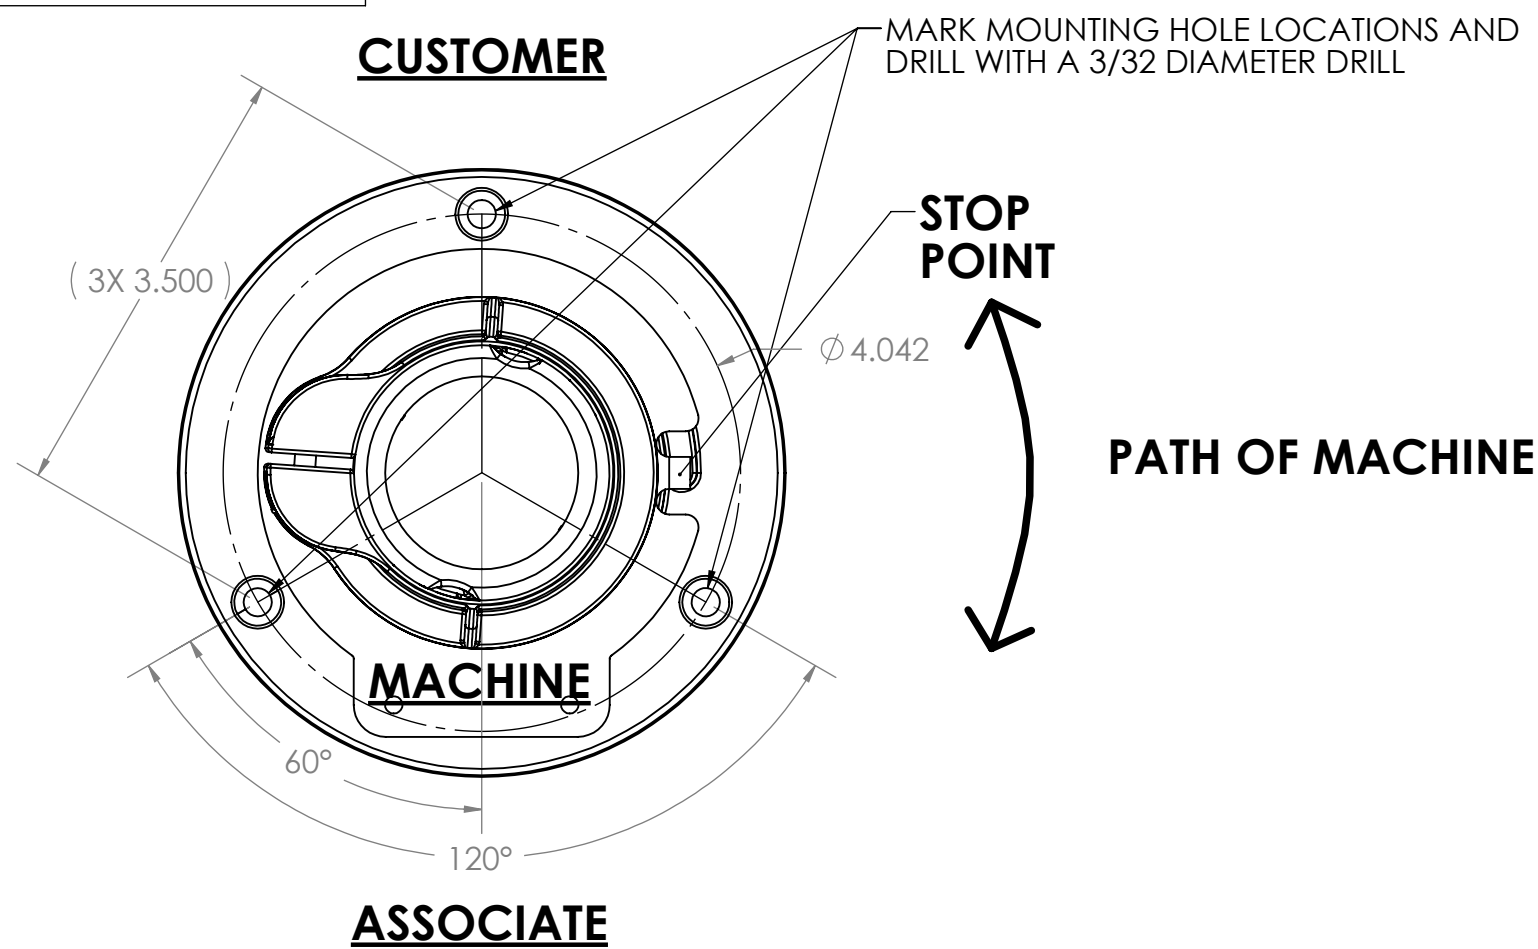

TOOLS LIST:

- 5/32 TAMPER RESISTANT HEX WRENCH (ENS P/N 367-1046) OR 5/32 TAMPER RESISTANT HEX BIT (ENS P/N 367-1102) WITH SOCKET DRIVER. ENS PARTS EACH ORDERED SEPARATELY.
- #2 PHILLIPS SCREW DRIVER
- 2.0MM SHORT ARM WRENCH (PROVIDED)

ASSEMBLY STEPS:

- ROTATE THE **SWIVEL BASE** LEFT OR RIGHT TO THE STOP POINT AND THEN COMPARE IT TO THE ILLUSTRATIONS ABOVE TO DETERMINE WHICH WAY YOU WANT IT TO ROTATE.
- ASSEMBLE THE **SWIVEL BASE** TO THE **COUNTER** BY USING THE **3X #10 X 1.00\"/>**

DIMS. AND TOLERANCES PER ASME Y14.5 - 1994	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	
FRACTIONAL	± 1/32
2 PLC. DEC.	± .03
3 PLC. DEC.	± .010
ANGULAR	± 0°30'

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS IS PROHIBITED.

F		06/20/16	JEB	SCB
REV.	DESCRIPTION	DATE	BY	CHK'D
A.	MCLAUGHLIN	5/27/2014		
HAVIS				
TITLE CUSTOMER INSTRUCTIONS, LOW CONTOUR 8°-90°, WITH REAR LOCKING PLATE, CENTER HOLE SWIVEL STAND, ANTI SKIMMING FEATURE, EMV CARD CLEARANCE, VERIFONE MX925				
SIZE	DWG. NO.	367-3047	REV.	F
C				SHEET 1 OF 1