
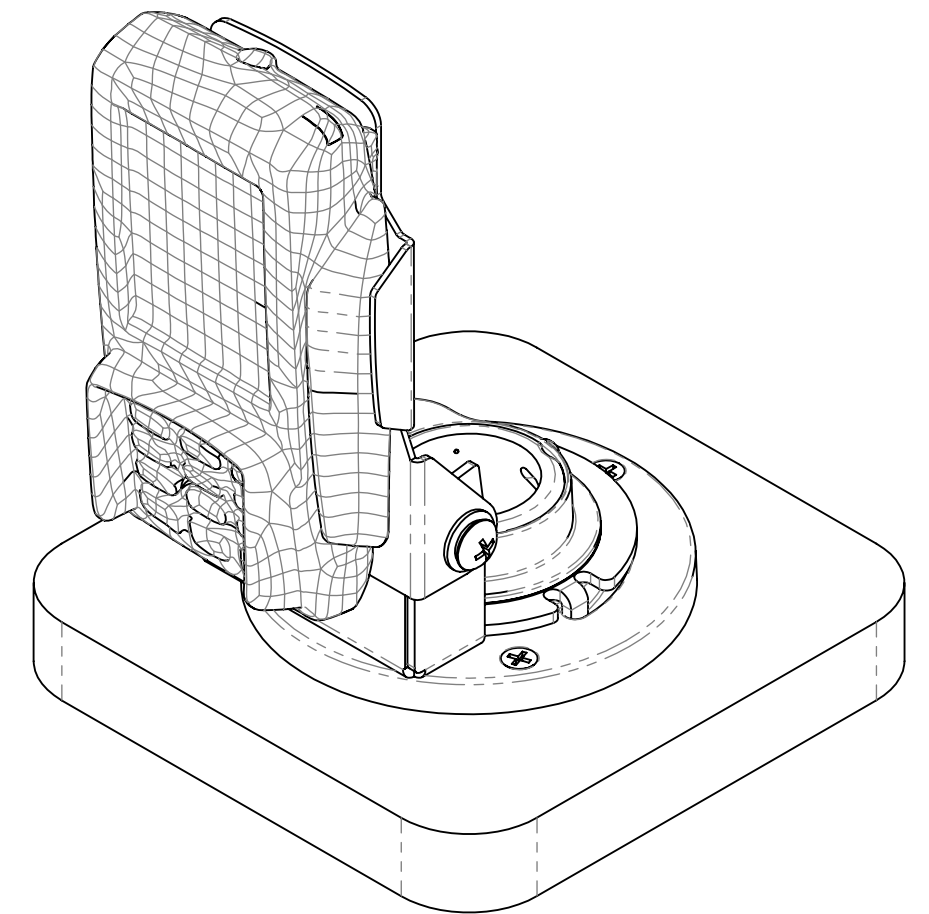
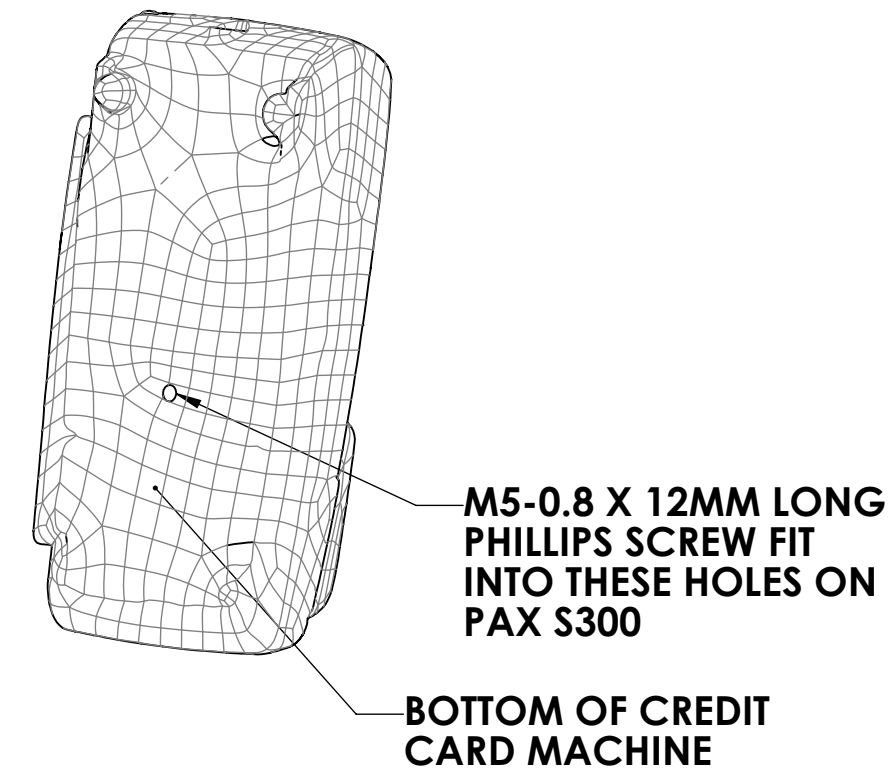
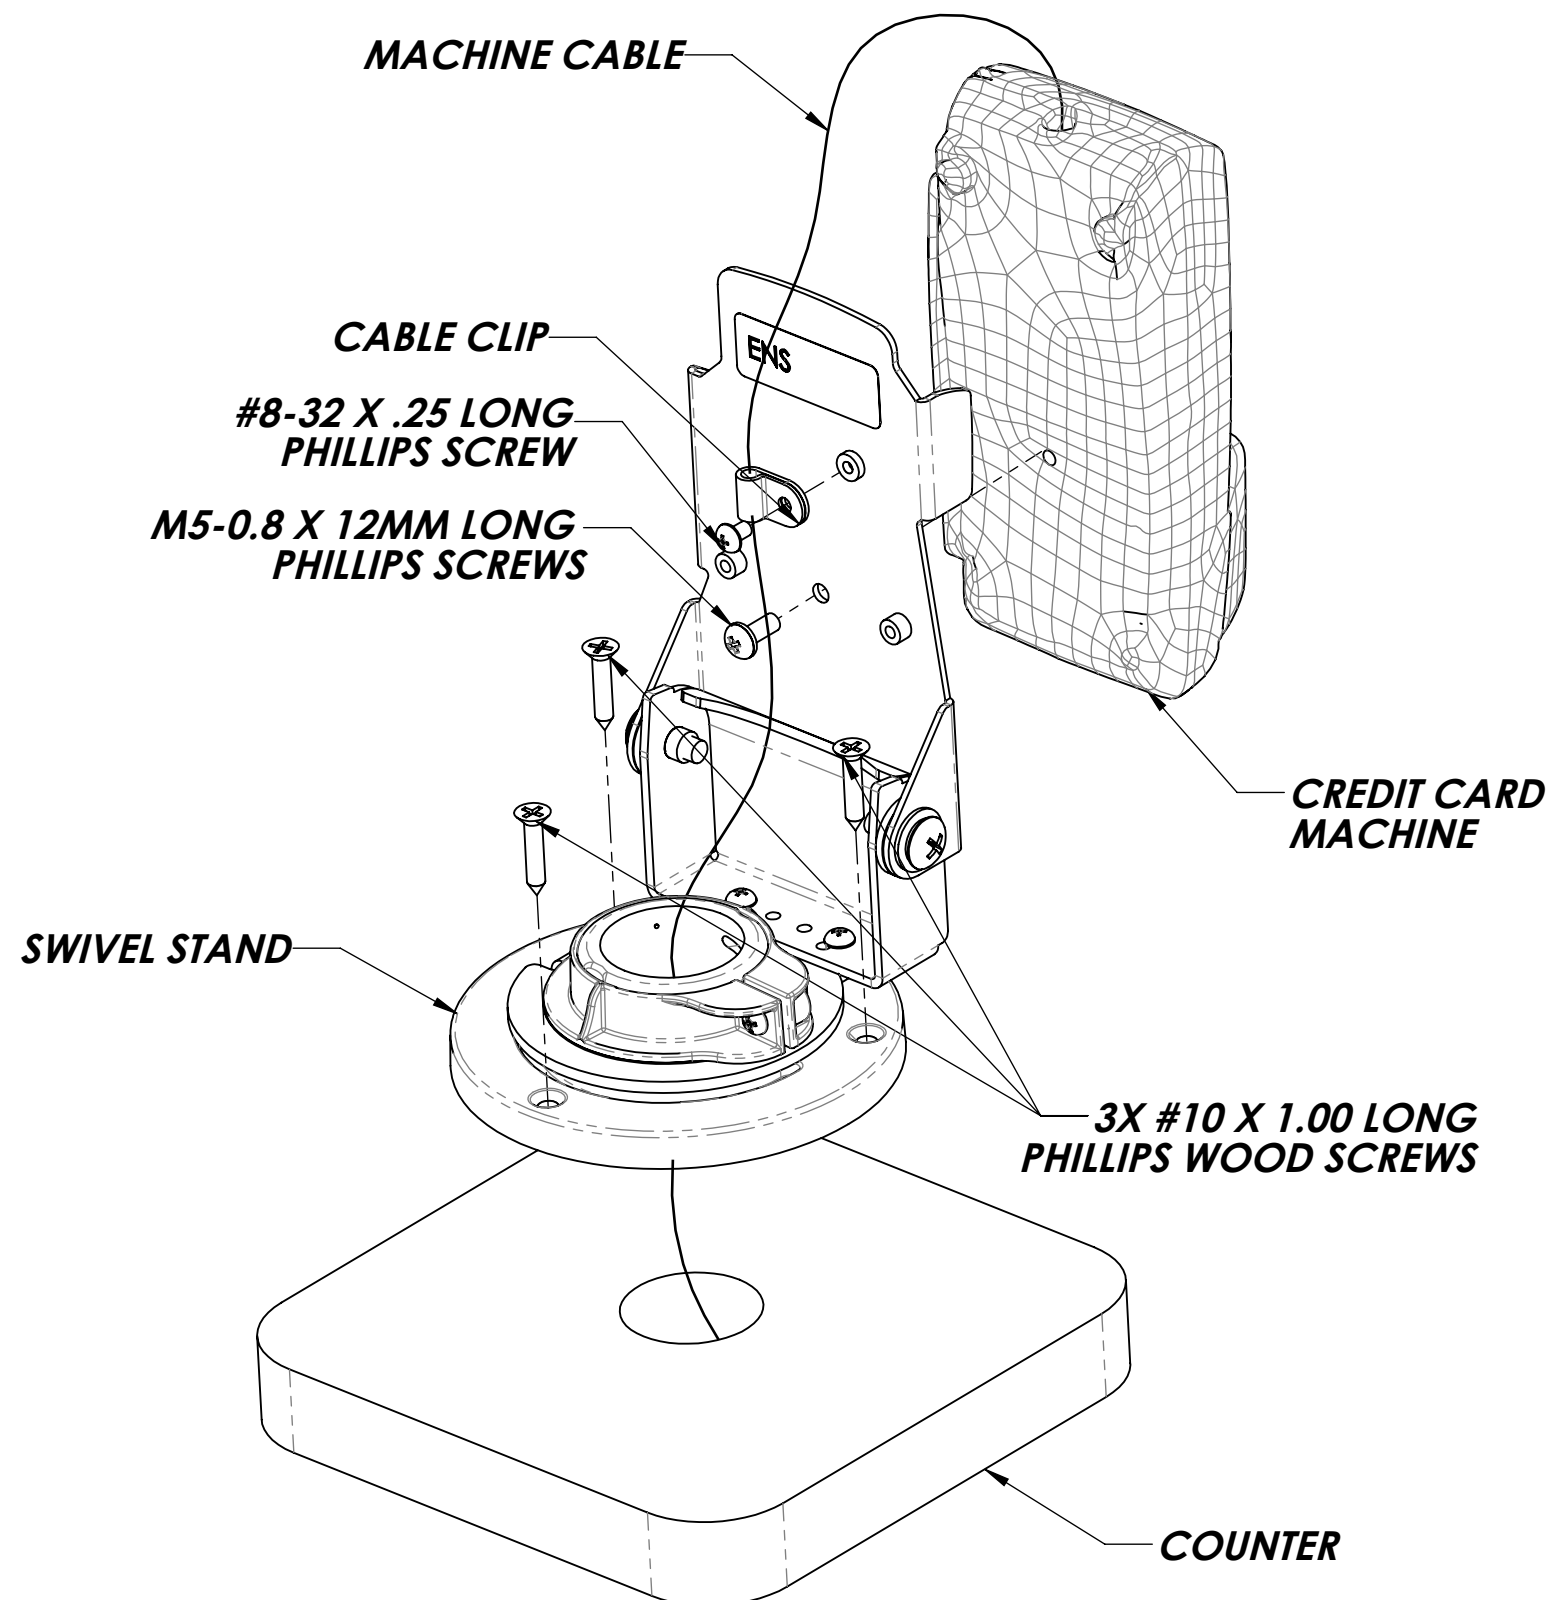
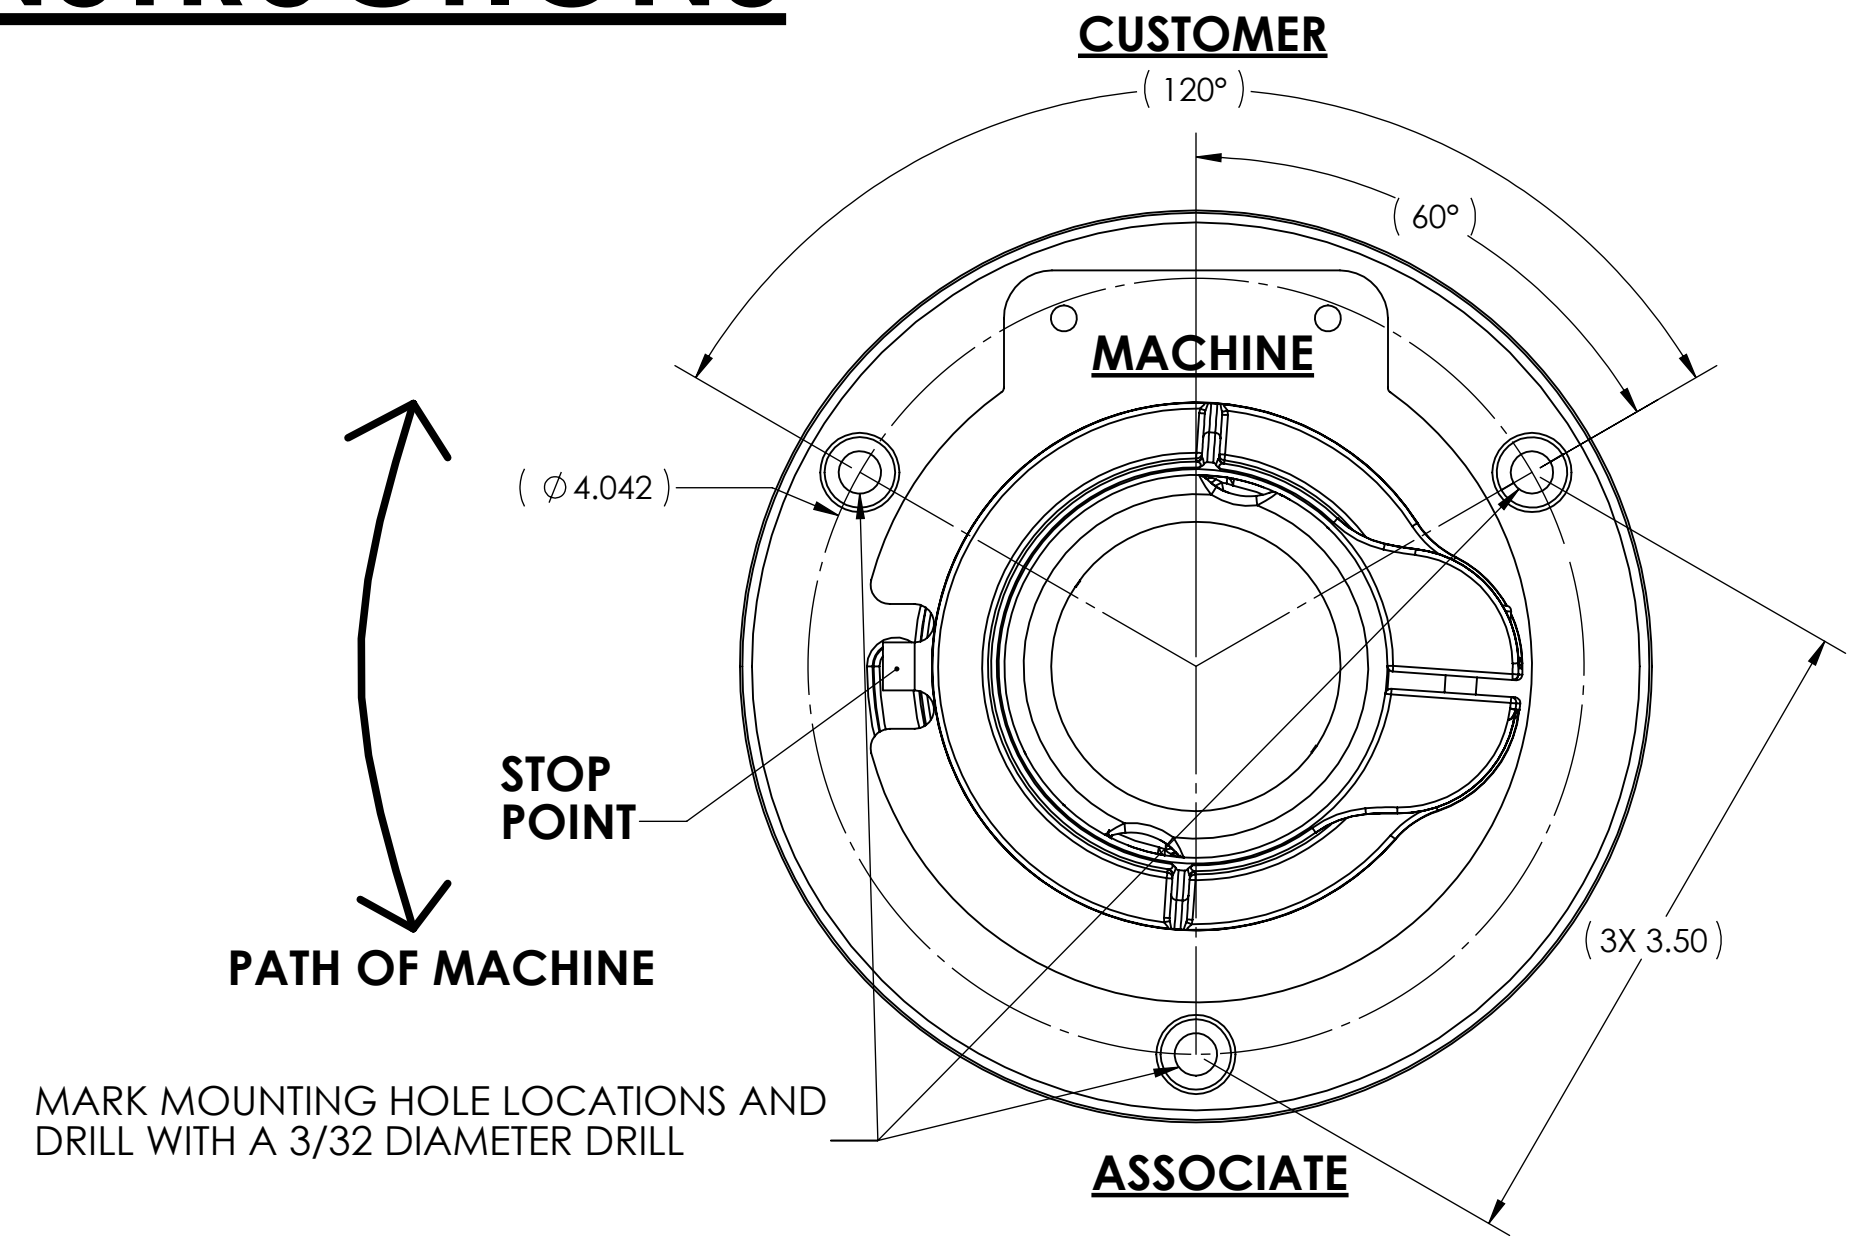


# MOUNTING OPTION #1

# INSTALLATION INSTRUCTIONS

# MOUNTING OPTION #2

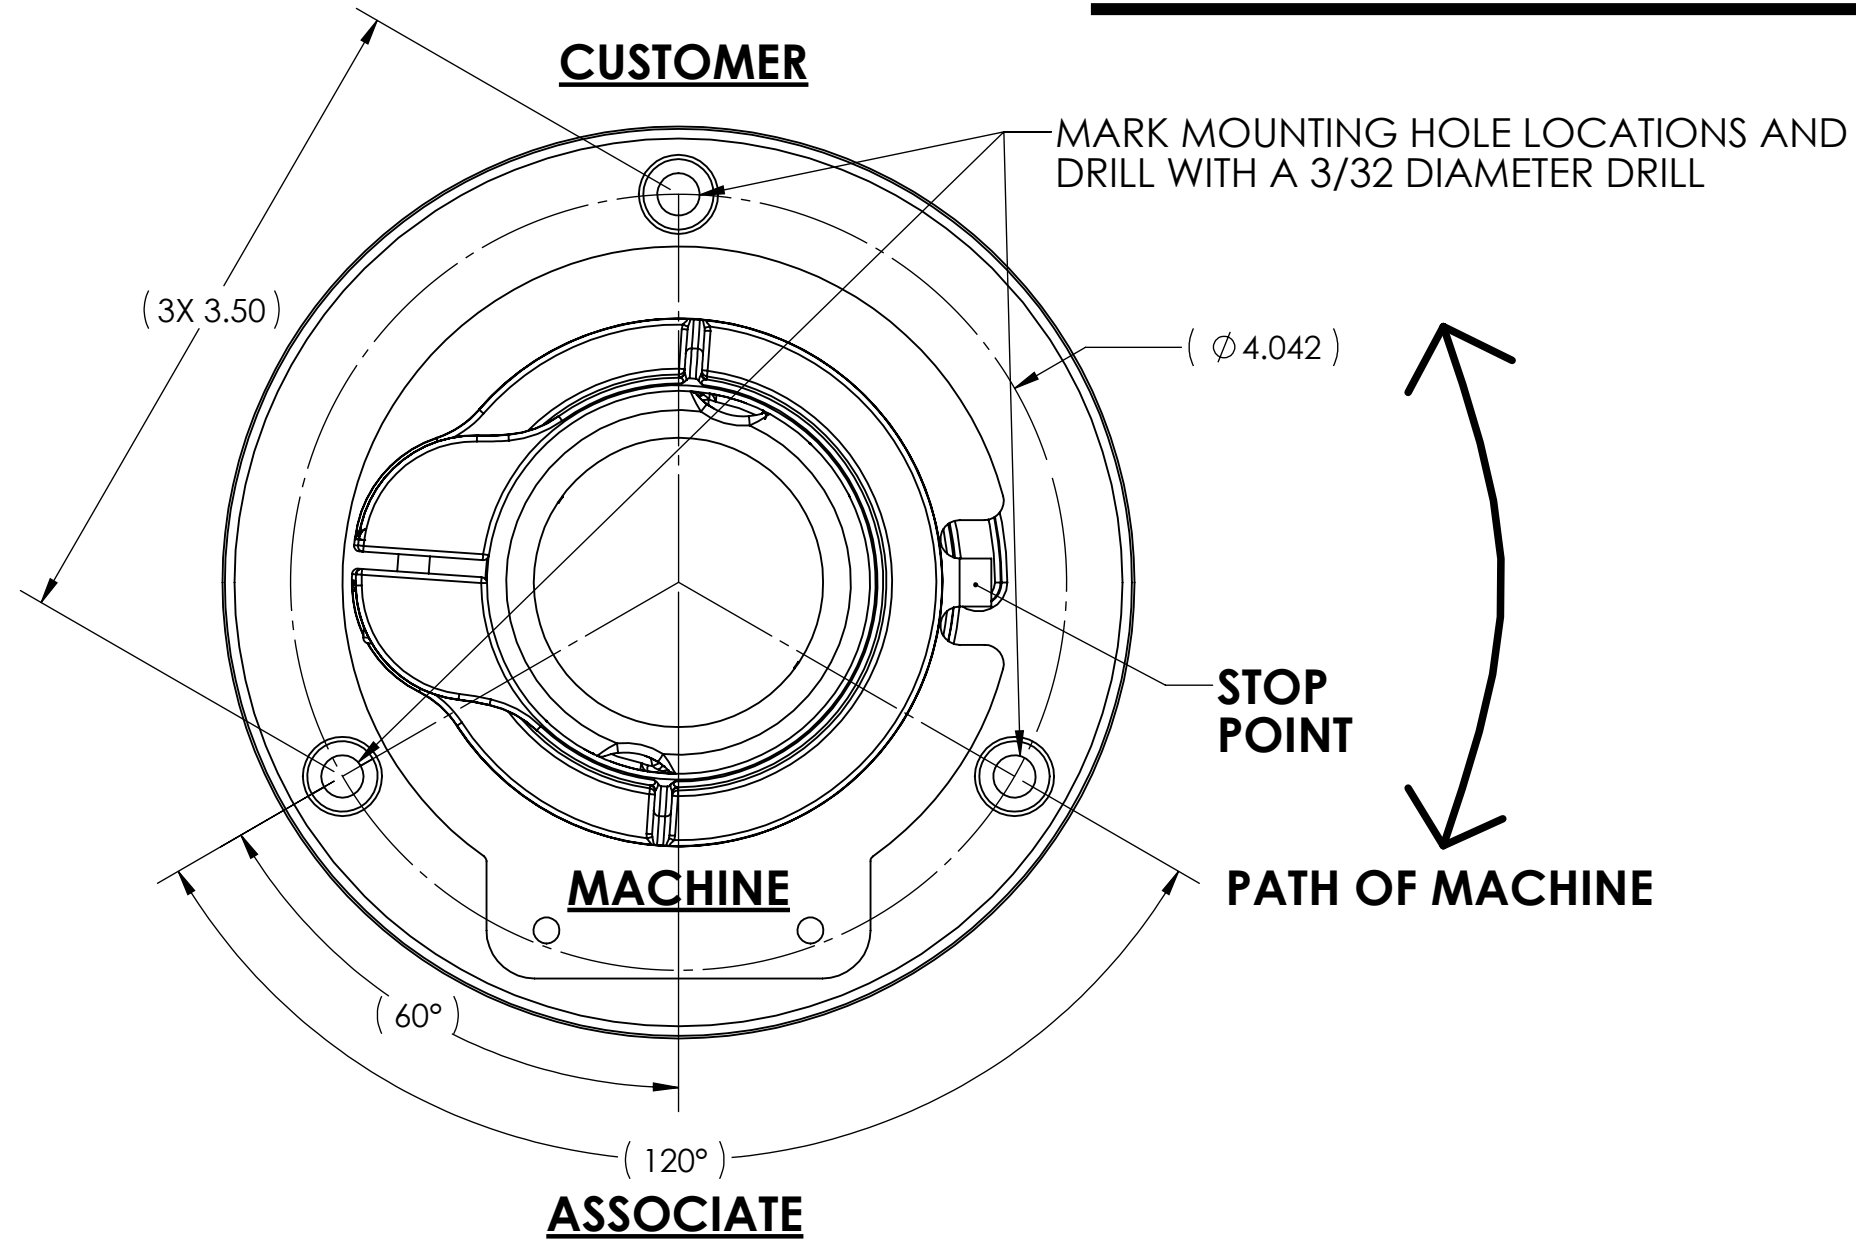

### TOOLS LIST:

- #2 PHILLIPS SCREW OR DRILL DRIVER

### ASSEMBLY STEPS:

- ROTATE THE **SWIVEL STAND** LEFT OR RIGHT TO THE STOP POINT AND THEN COMPARE IT TO THE ILLUSTRATIONS ABOVE TO DETERMINE WHICH WAY YOU WANT THE **SWIVEL STAND** TO ROTATE.
- ASSEMBLE THE **SWIVEL STAND** TO THE **COUNTER** WITH THE **3X #10 X 1.00 LONG PHILLIPS WOOD SCREWS** AS SHOWN.
- ATTACH **CREDIT CARD MACHINE** ONTO **SWIVEL STAND** WITH **M5-0.8 X 12MM LONG PHILLIPS SCREWS** AS SHOWN MAKING SURE THE SCREW THREAD INTO THE HOLE ON THE BOTTOM OF **CREDIT CARD MACHINE**.
- ROUTE THE **MACHINE CABLE** THROUGH THE **CABLE CLIP** AND ATTACH THE **CABLE CLIP** TO **SWIVEL STAND** WITH **#8-32 X .25 LONG PHILLIPS SCREW** AS SHOWN.

DIMS. AND TOLERANCES PER ASME Y14.5 - 1994  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

FRACTIONAL	± 1/32
2 PLC. DEC.	± .03
3 PLC. DEC.	± .010
ANGULAR	± 0°30'

REV.	DESCRIPTION	DATE	BY	CHK'D
C		04/18/17	JEB	CDB
Z. GRAGE		11/5/2015		
<b>HAVIS</b>				
TITLE CUSTOMER INSTALLATION, LOW CONTOUR STAND 8° TO 90°, CENTER HOLE SWIVEL, PAX S300				
SIZE C		DWG. NO. 367-3574		REV. C
				SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS IS PROHIBITED.