
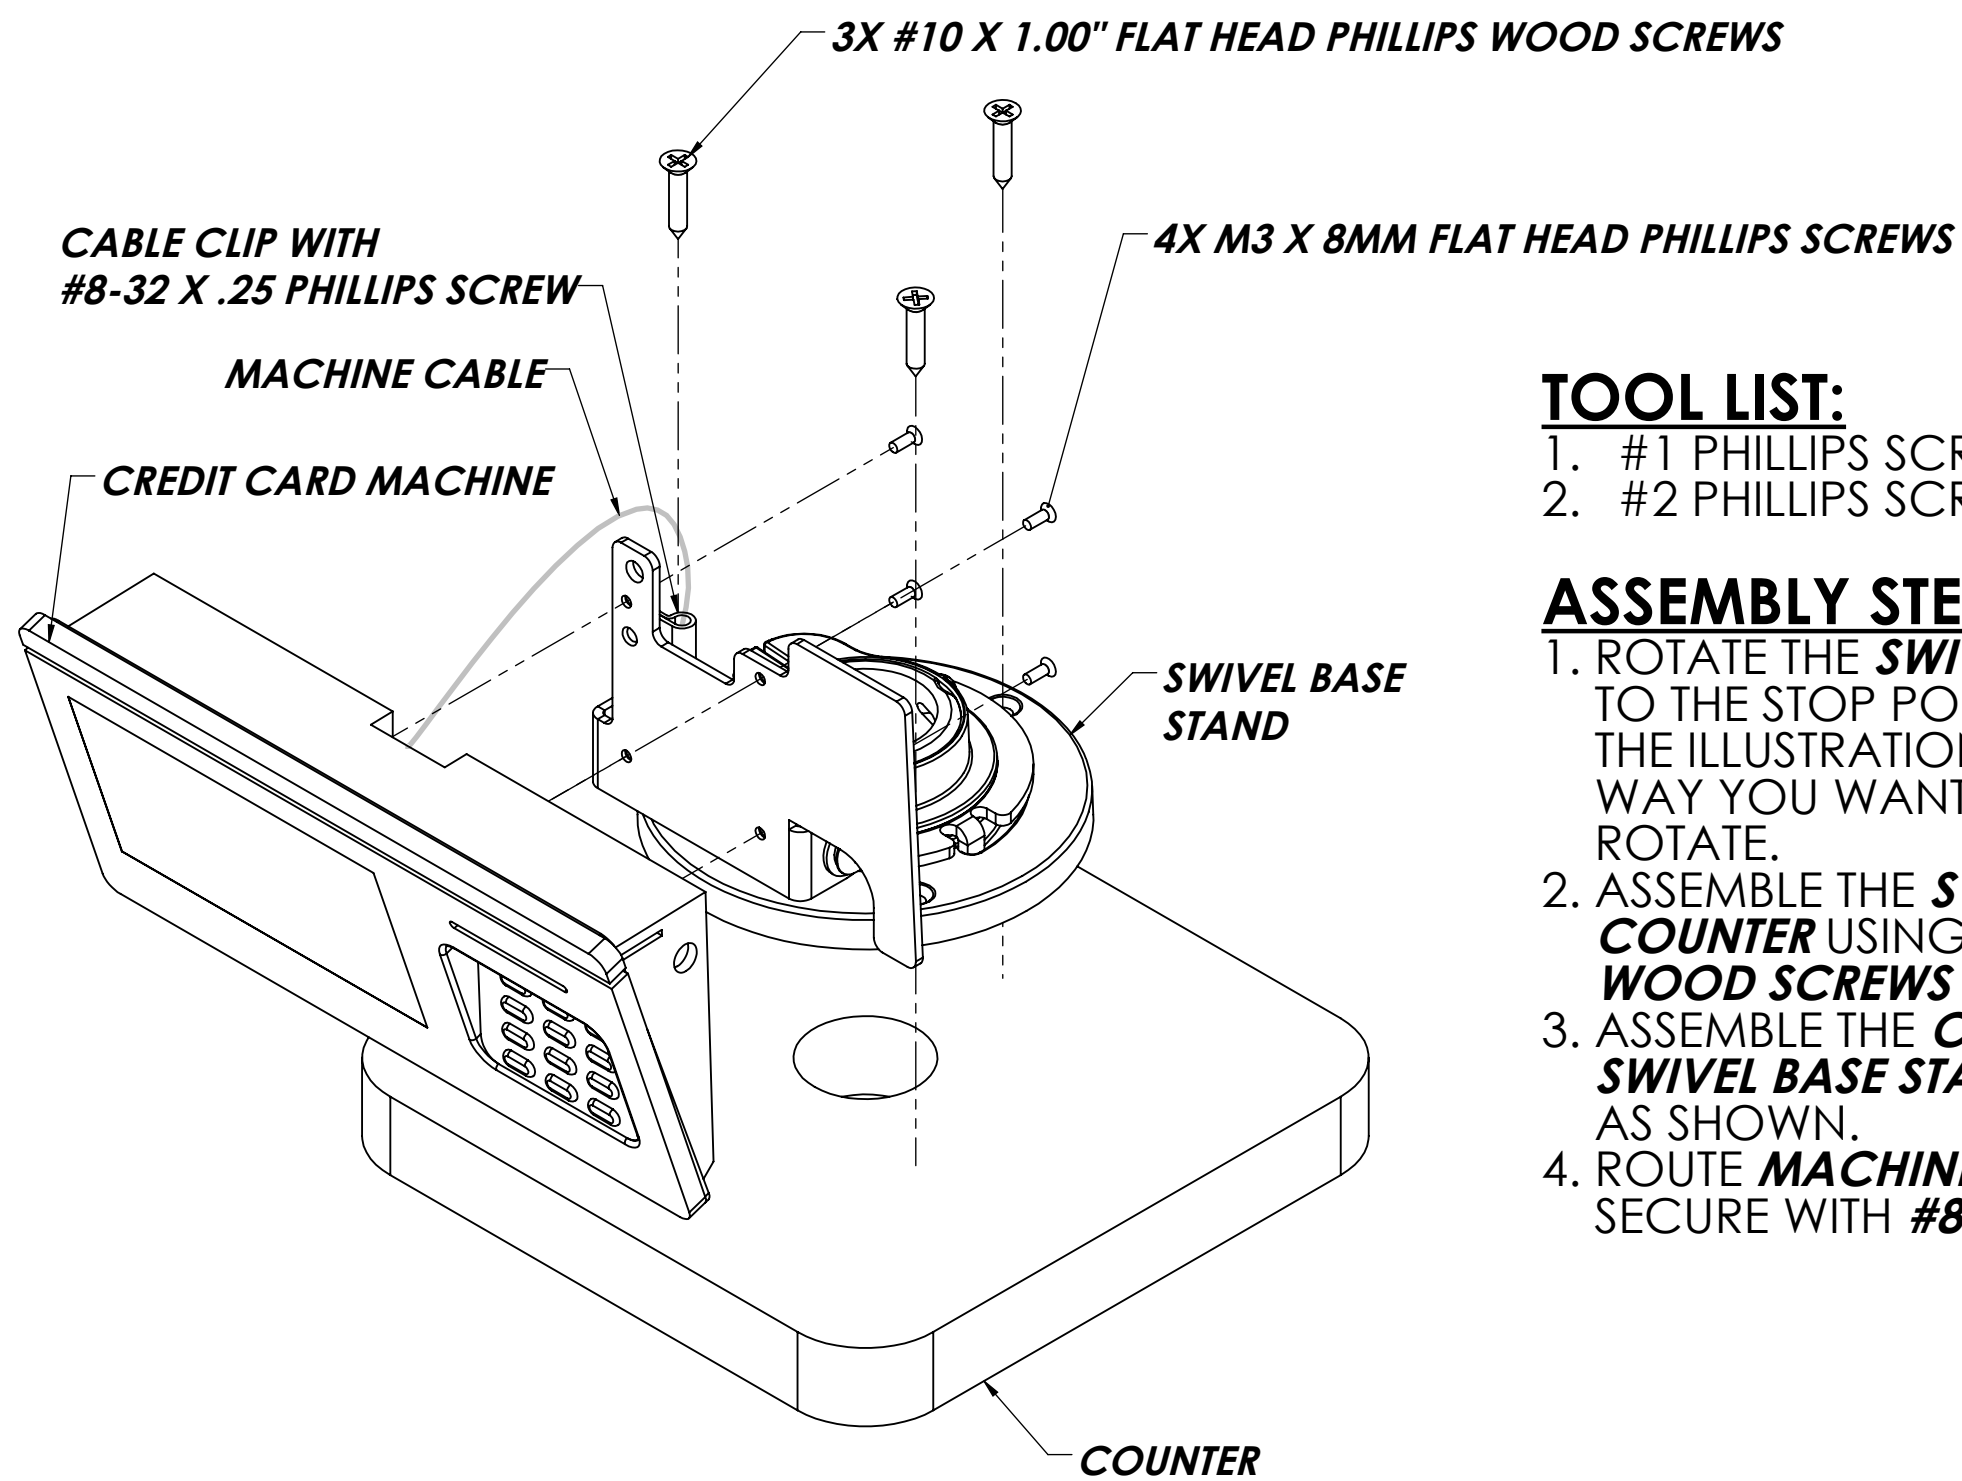
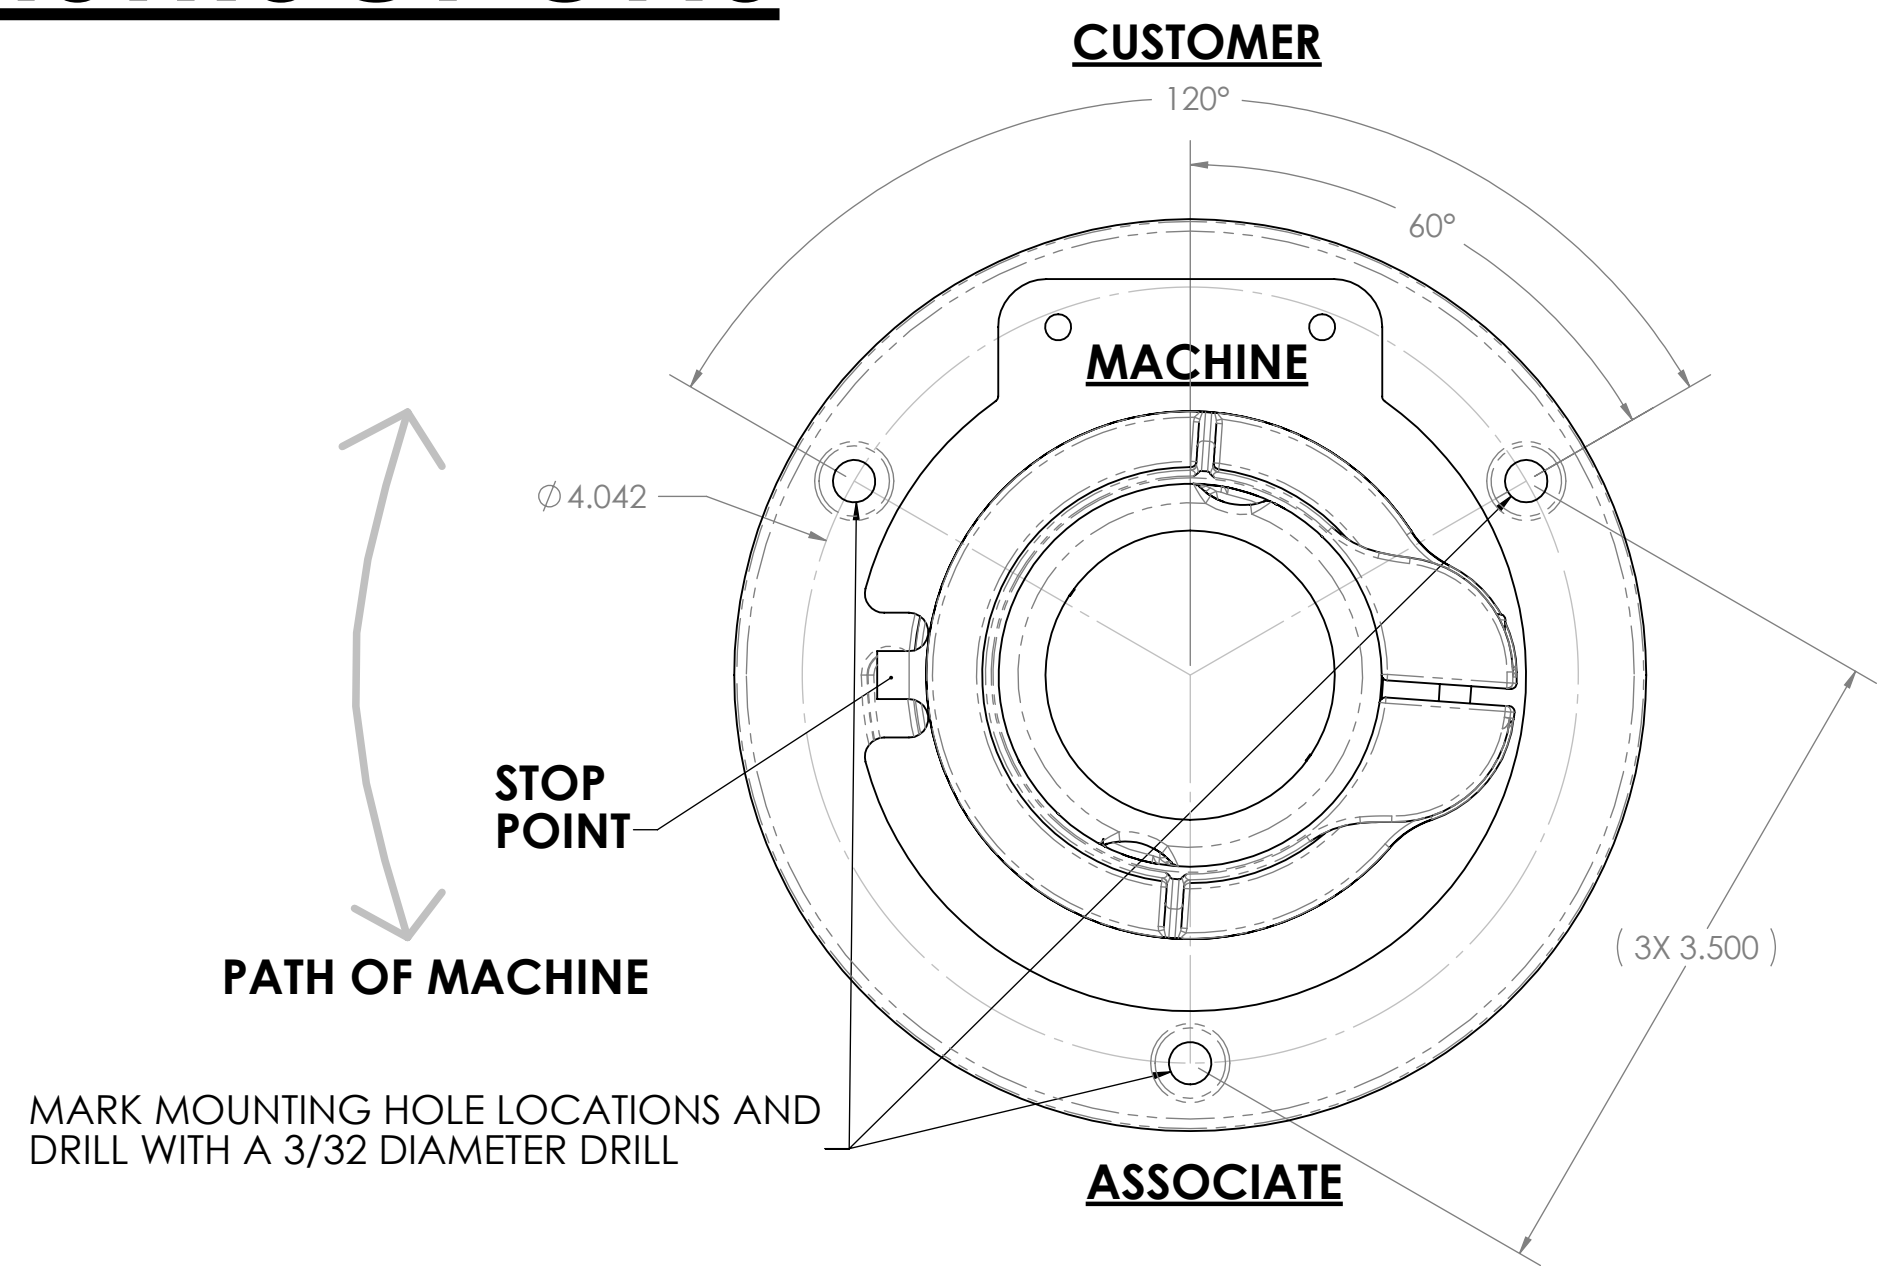


MOUNTING OPTION #1

INSTALLATION INSTRUCTIONS

MOUNTING OPTION #2

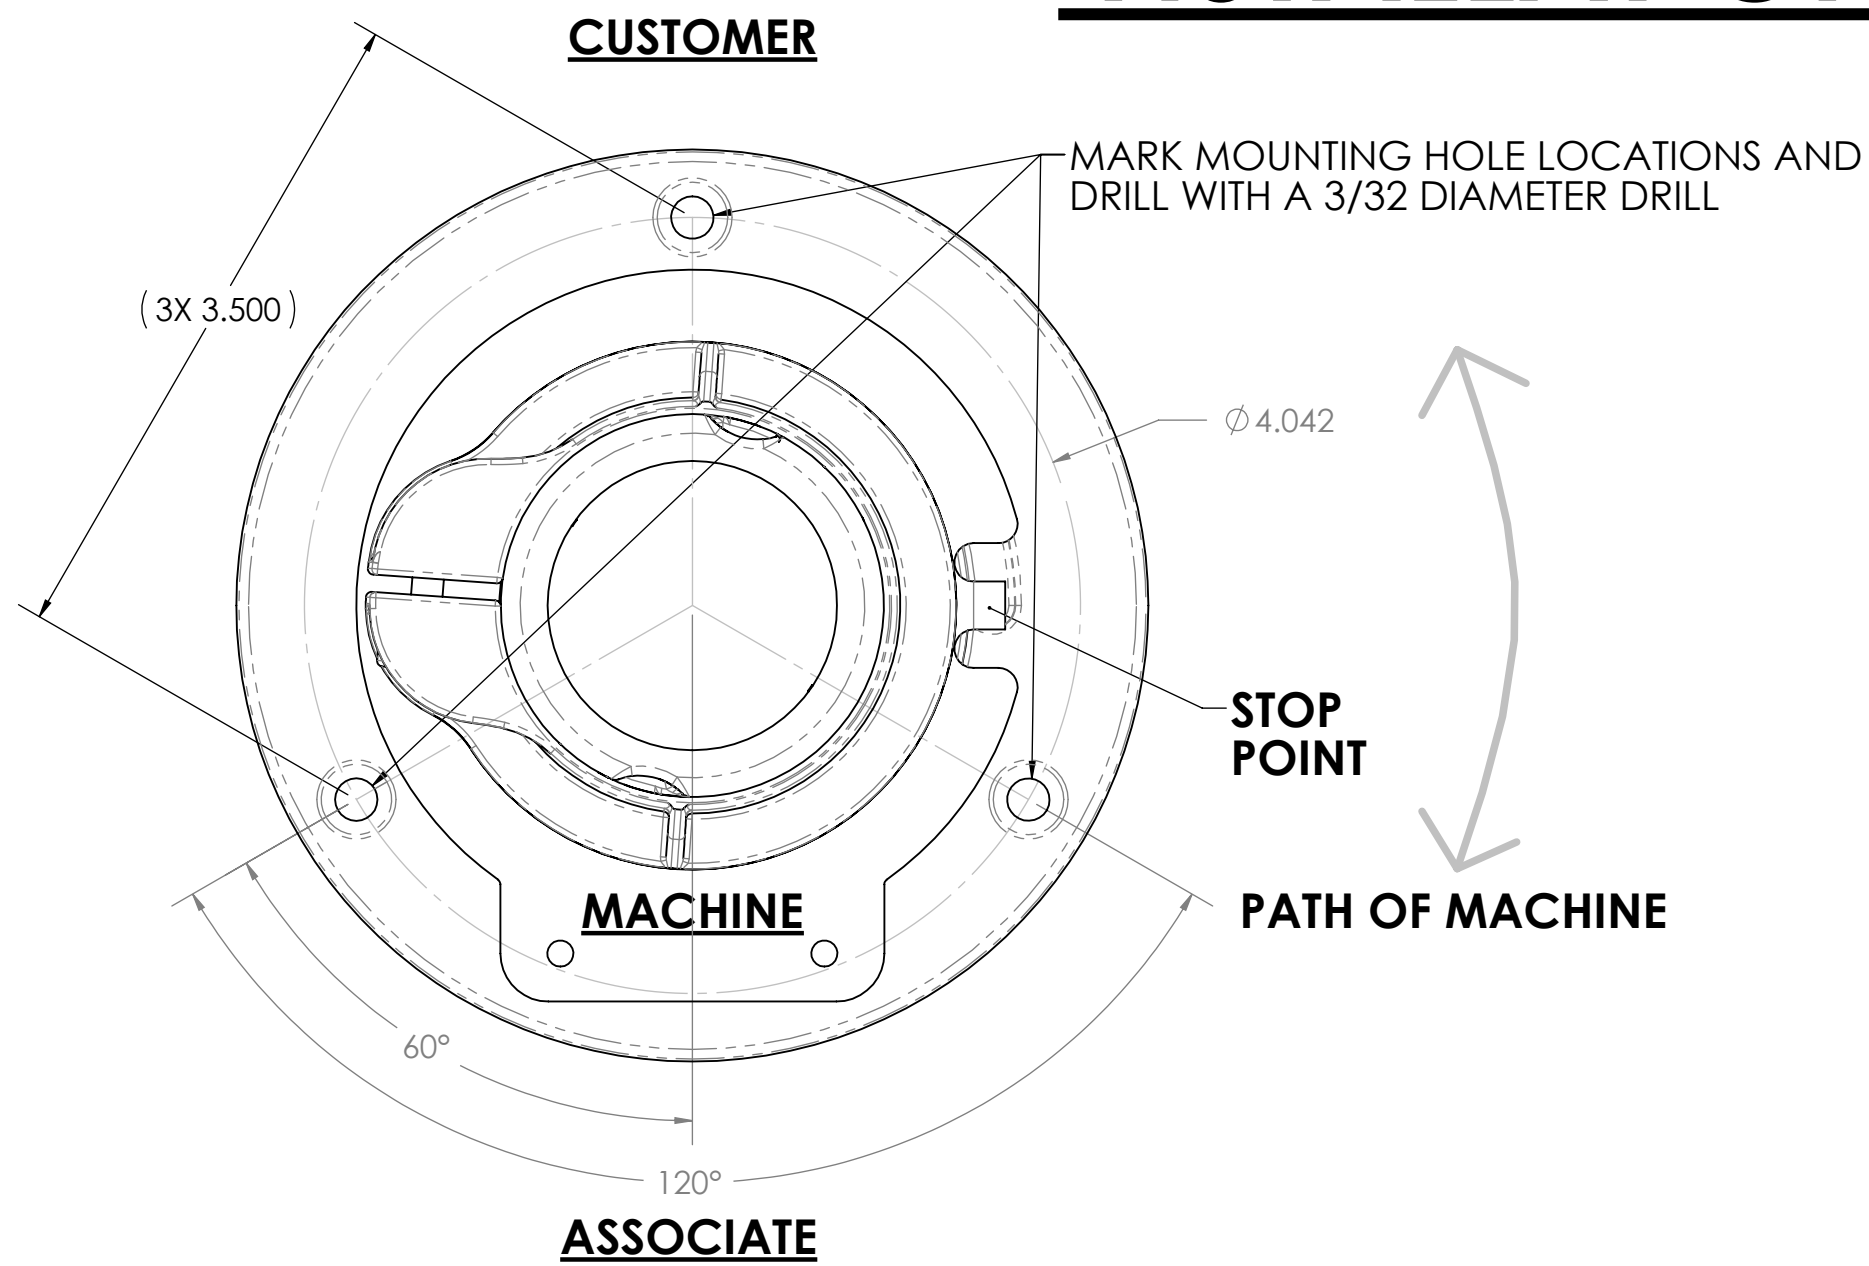


TOOL LIST:

1. #1 PHILLIPS SCREW OR DRILL DRIVER
2. #2 PHILLIPS SCREW OR DRILL DRIVER

ASSEMBLY STEPS:

1. ROTATE THE **SWIVEL BASE STAND** LEFT OR RIGHT TO THE STOP POINT AND THEN COMPARE IT TO THE ILLUSTRATIONS ABOVE TO DETERMINE WHICH WAY YOU WANT THE **SWIVEL BASE STAND** TO ROTATE.
2. ASSEMBLE THE **SWIVEL BASE STAND** TO THE **COUNTER** USING **3X #10 X 1.00 FLAT HEAD PHILLIPS WOOD SCREWS** AS SHOWN.
3. ASSEMBLE THE **CREDIT CARD MACHINE** TO THE **SWIVEL BASE STAND** WITH **4X M3 X 8MM FLAT HEAD PHILLIPS SCREWS** AS SHOWN.
4. ROUTE **MACHINE CABLE** THROUGH **CABLE CLIP** AND SECURE WITH **#8-32 X .25 PHILLIPS SCREW** AS SHOWN.

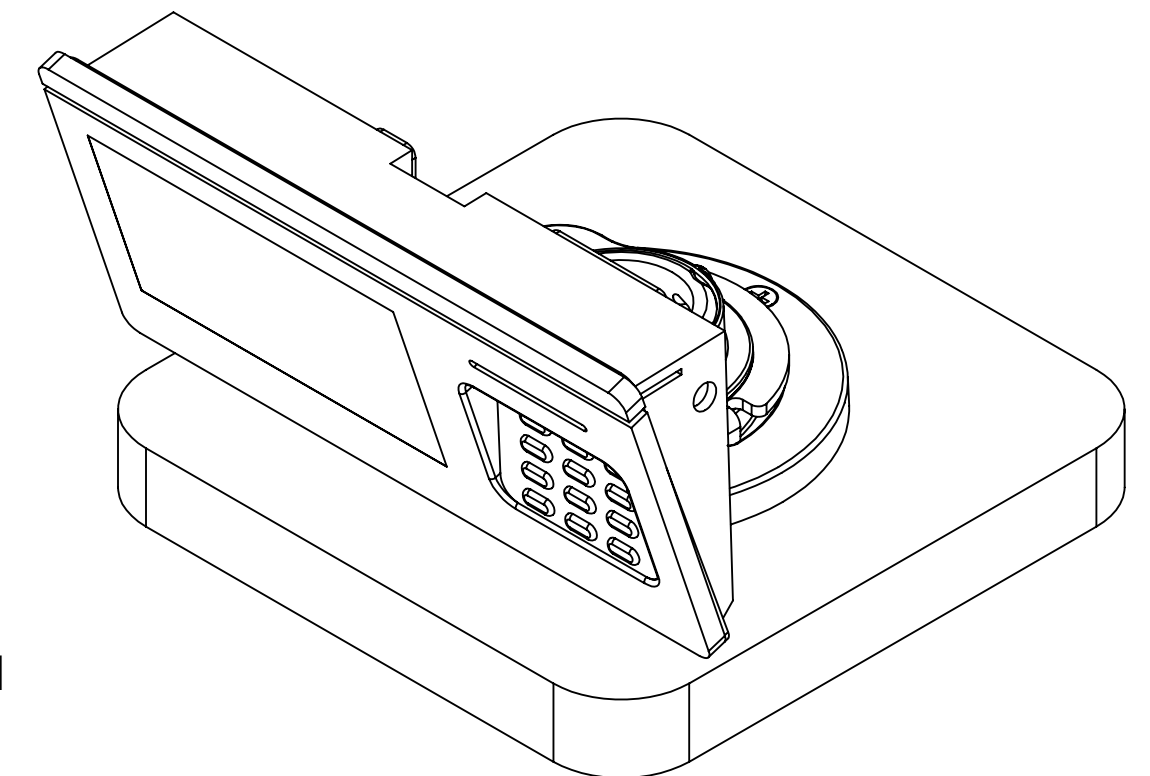

DIMS. AND TOLERANCES PER ASME Y14.5 - 1994
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
FRACTIONAL ± 1/32
2 PLC. DEC. ± .03
3 PLC. DEC. ± .010
ANGULAR ± 0°30'

REV.	DESCRIPTION	DATE	BY	CHK'D
A		09/28/16	ARS	AN
HAVIS				
DRAWN A. SCHLEY		DATE 09/28/16		
CHECKED		DATE		
DO NOT SCALE DRAWING		MATERIAL SEE B.O.M.		
FINISH N/A		SIZE C		
TITLE CUSTOMER INSTALLATION, LOW CONTOUR STAND 16°-106°, CENTER HOLE SWIVEL, EQUINOX LUXE 8500i		DWG. NO. 367-4183		REV. A
				SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS IS PROHIBITED.