


TOOL LIST:

1. #2 PHILLIPS SCREW DRIVER.
2. 2.5MM HEX ALLEN WRENCH.

ASSEMBLY STEPS:

1. INSTALL THE **CUSTOMER'S MONITORS** ONTO THE **MONITOR MOUNT PIVOT BRACKETS** BY USING THE **8X M4 X 8MM LONG** OR **10MM LONG PHILLIPS SCREWS**.
2. ROUTE **MONITOR CABLES** THROUGH BOTTOM AND OUT THE SLOT IN THE **SWIVEL BASE**. SECURE **MONITOR CABLES** TO **BRIDGE LANCE** BY USING A **CABLE TIE**. SEE **SIDE VIEW**. ROTATE THE **CABLE CATCH** CLOSED. SEE **BOTTOM VIEW**.
3. TO ADJUST THE SWIVEL TENSION, ADJUST THE **SWIVEL TENSION ADJUSTMENT SCREW**.
4. ATTACH THE **2X BASE COVERS** TO THE **SWIVEL BASE** AS SHOWN.
5. **OPTIONAL:** TO ADJUST THE TILT TENSION, ADJUST THE **4X TILT TENSION ADJUSTMENT SCREWS** BY USING A 5/32" HEX ALLEN WRENCH (PROVIDED).

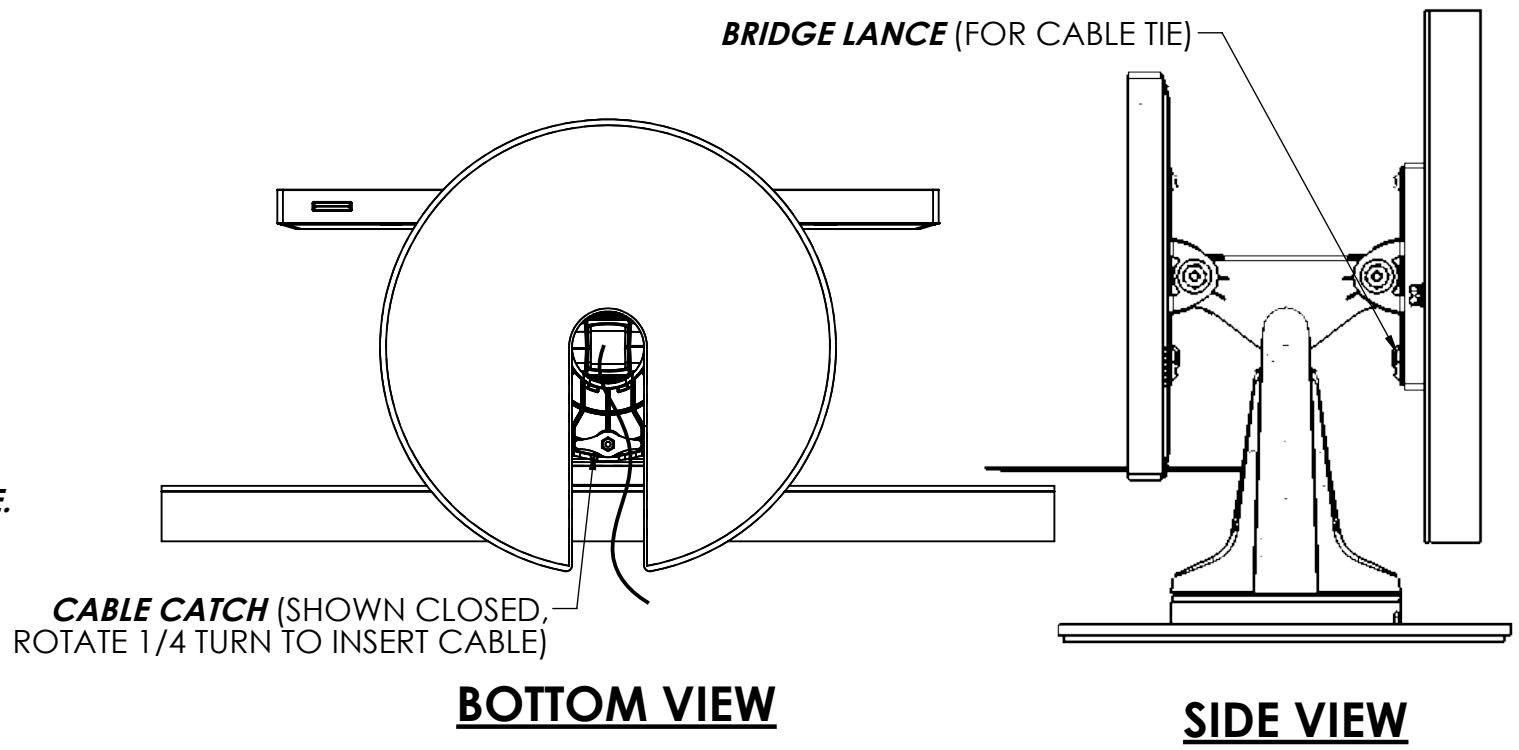

DWG. NO. DM-10-212	REV. A	TITLE
DRAWN S. YANG	DATE 2/14/2022	

DISPLAY MOUNT,
DUAL VESA, HEAVY DUTY,
FREE STANDING BASE



SHEET 1 OF 1

CUSTOMER INSTRUCTIONS