
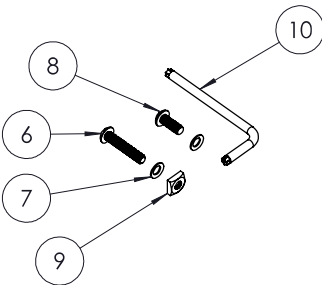


INSTALLATION INSTRUCTIONS:

- 1. Review hardware contents and ensure all items are available for assembly.
- 2. Remove existing side lugs and rear fences (if any).
- 3. Loosely assemble the new kit to the base tray as shown in exploded view.
- 4. Adjust tray according to the configuration instructions in the UT-1000/2000 Series Owner's Manual (accessible at www.havis.com within the **UT-2002** product page).

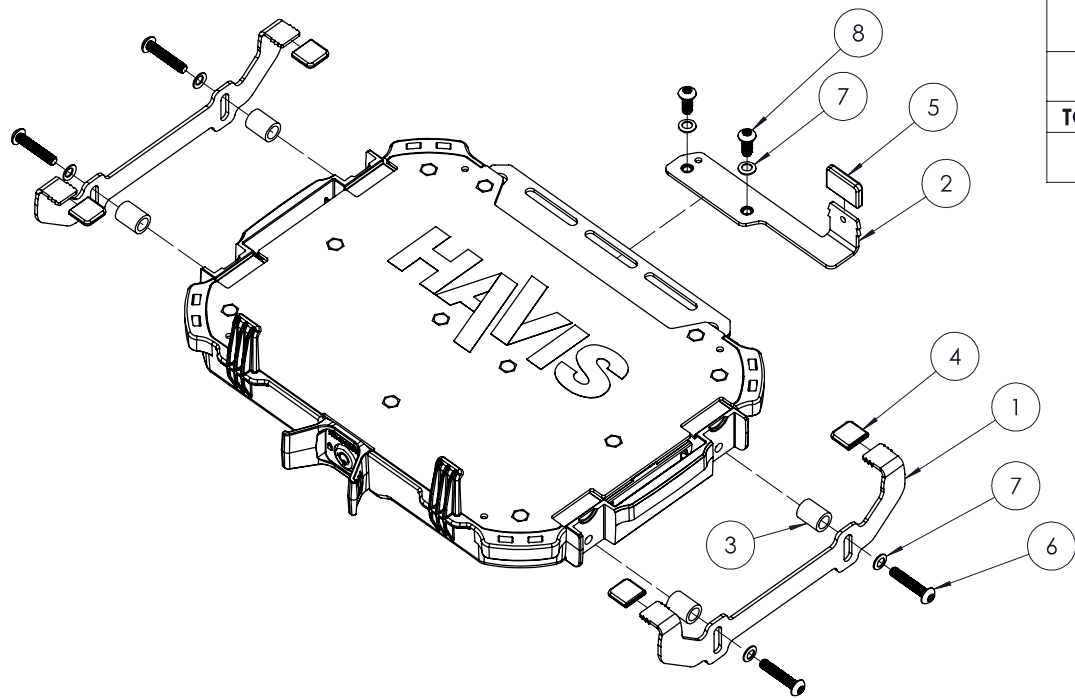

UT-2022-KIT HARDWARE CONTENTS

UT-2022-KIT HARDWARE CONTENTS			
PARTS			
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	10-014111	BRACKET, SIDE LUG	2
2	10-014112	BRACKET, REAR FENCE	1
3	UT-0187-MA-A	SPACER, ROUND, 0.438" OD x 0.297" ID x 0.563" LONG	4
4	GSM41120	CAP - 0.45" X 0.5", 0.04" THK	4
5	GSM41123	CAP, 0.75" X 0.5", .04" THK.	1
6	GSM33329	SCREW, 10-32X1, TORX SECURITY	5
7	GSM31089	WASHER, BELLEVILLE, SERRATED, #10	8
8	GSM33327	SCREW, BUTTON HEAD, PIN-IN-TORX, #10-32x0.5, CLEAR ZINC W/ PATCH	3
9	GSM30110	NUT, #10-32, 0.375" SQUARE X 0.130"	5
TOOLS			
10	GSM50261	L-KEY TAMPER RESIST, T25, 2-13/32" L	1

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

DRAWING NO.
UT-2022-KIT_INST

PRODUCT DESCRIPTION
UT-2022, UNIVERSAL TRAY SOLUTION


1-800-524-9900
WWW.HAVIS.COM

WEIGHT: (LBS)
2.480
REV. DATE
5-24-24