


CAUTION: UNIT MUST BE POWERED OFF AND THE SUPPLIED COMMUNICATION CABLE MUST BE DISCONNECTED FROM UNIVERSAL ADAPTER BOX PRIOR TO CONNECTING SWITCH CABLE TO TERMINALS IN BOX. THIS WILL PREVENT DAMAGE TO THE CONTROL BOARD IF TERMINALS LABELED ON (+5v) AND OFF (GND) ARE ACCIDENTALLY JUMPED TOGETHER. DAMAGE DUE TO THE CONNECTING OF +5v TO GROUND WILL NOT BE COVERED UNDER WARRANTY!

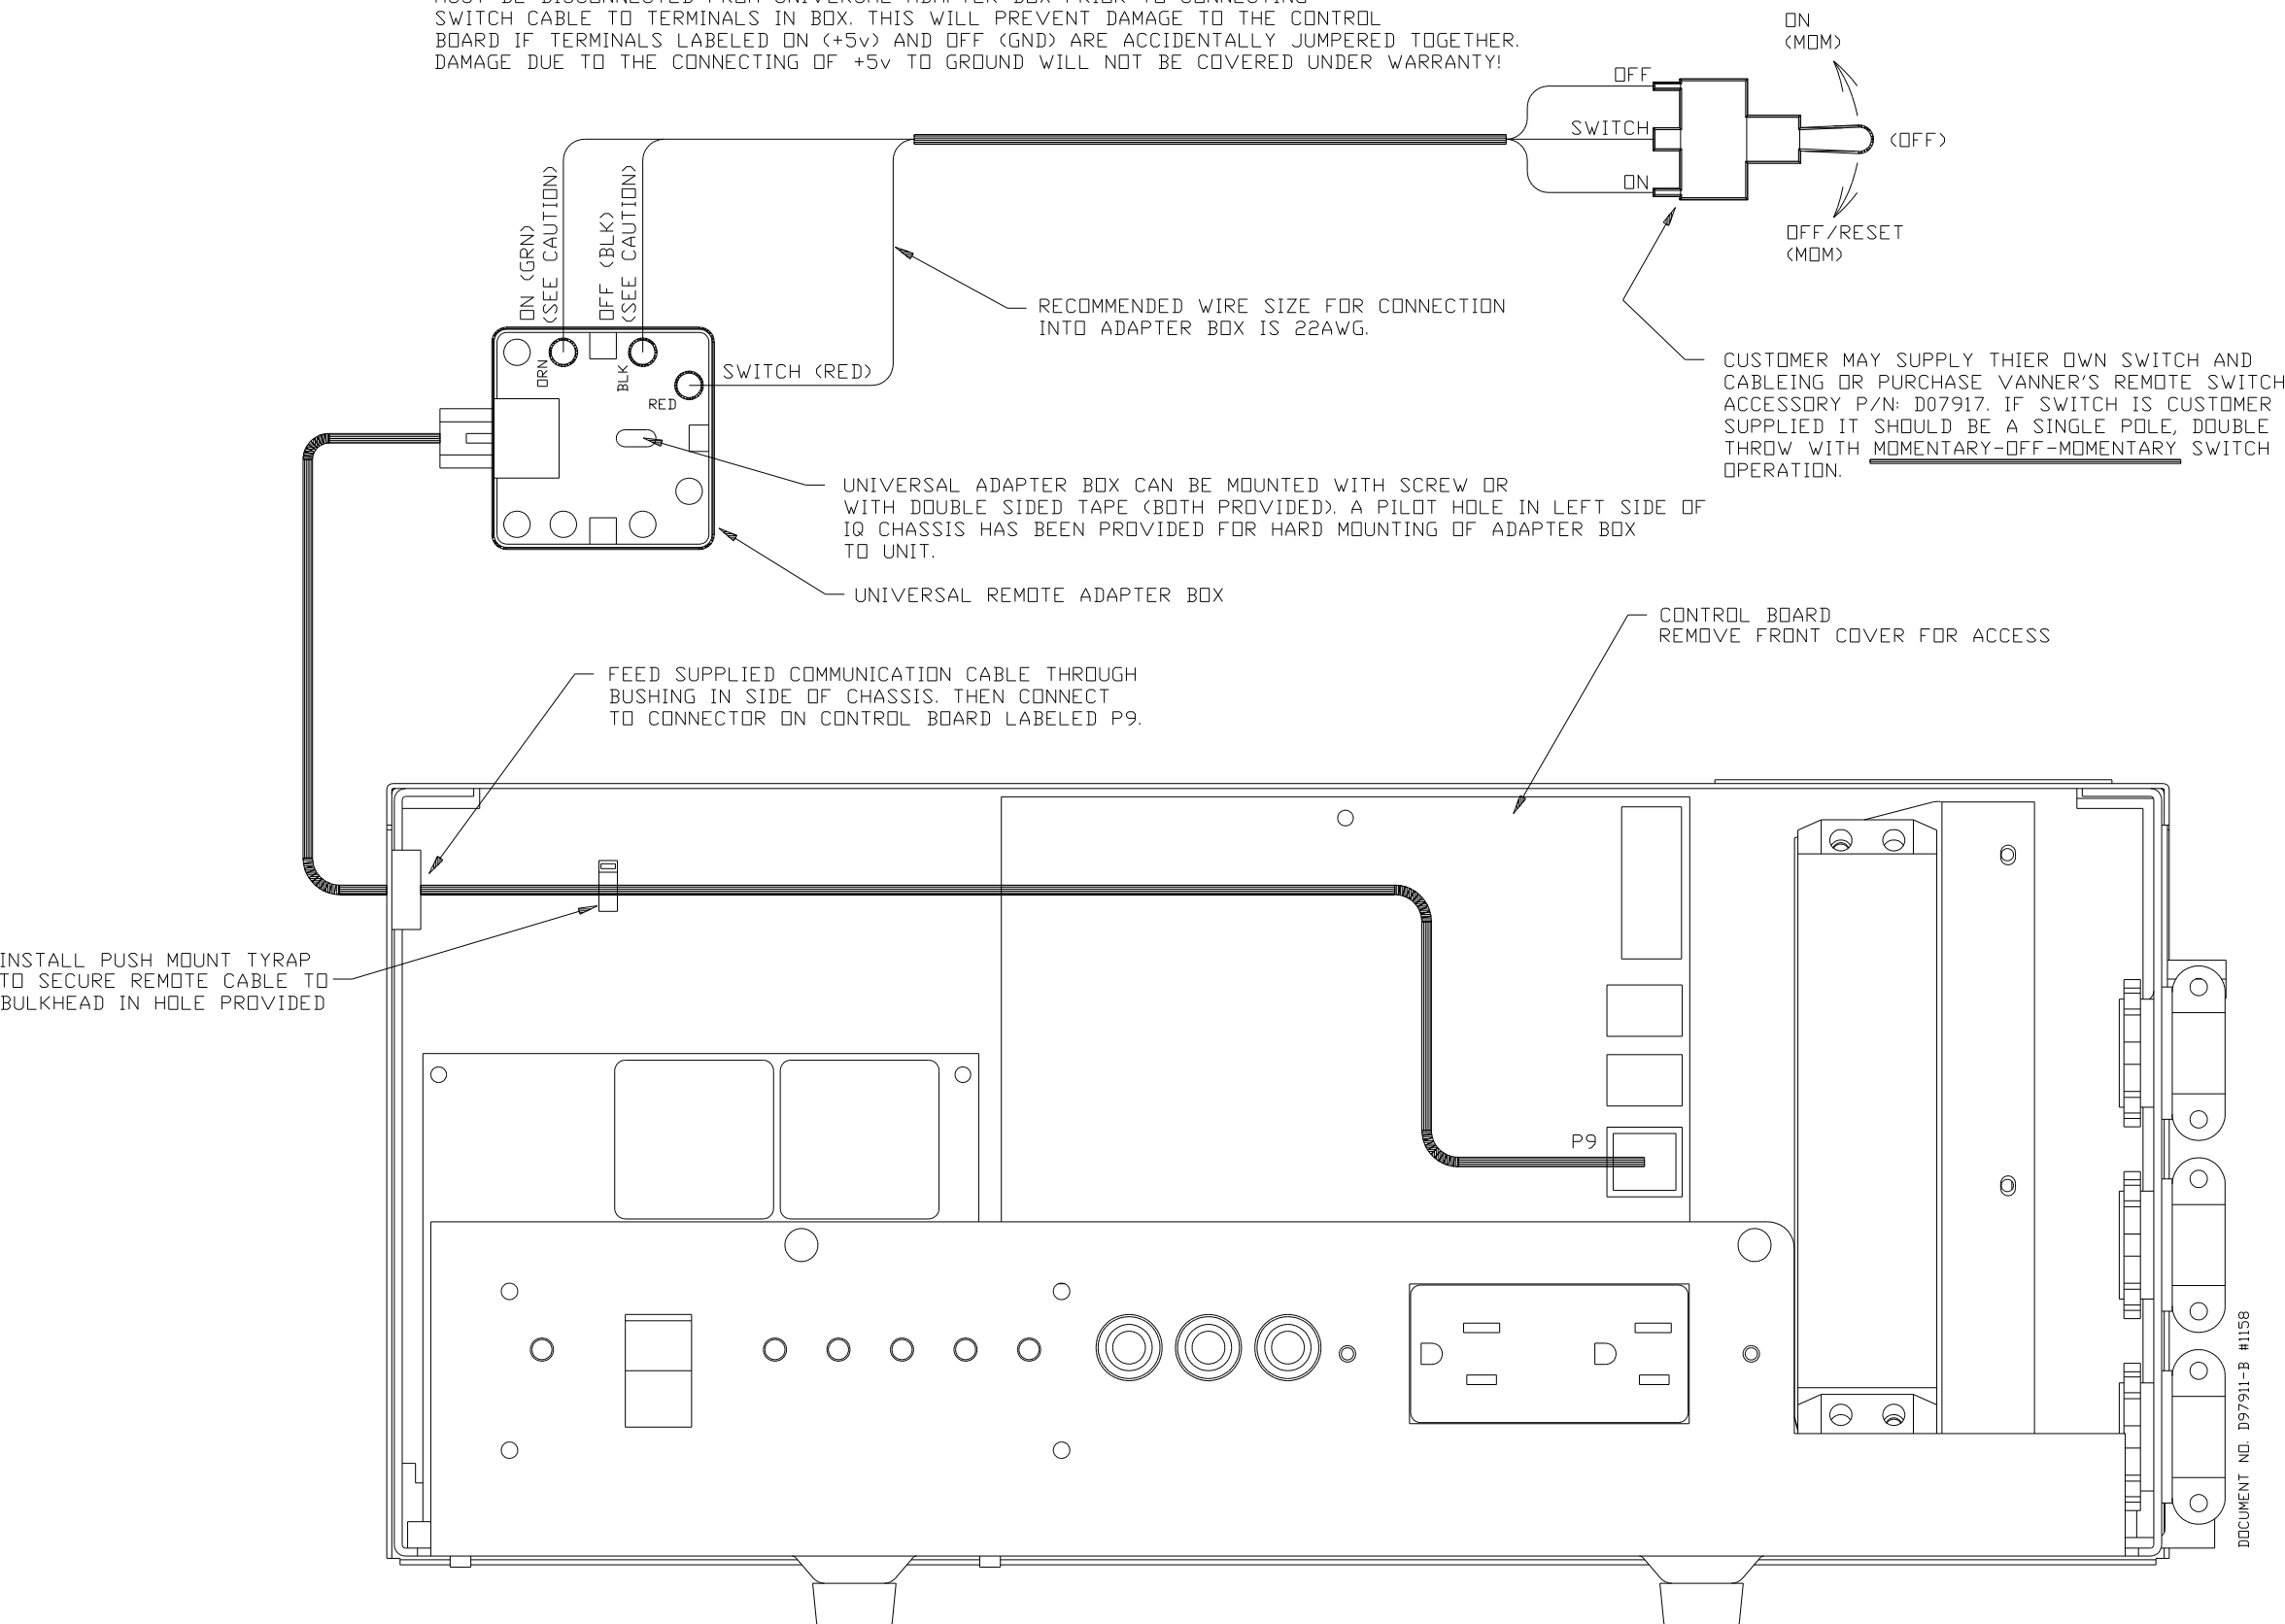

UNIVERSAL REMOTE ADAPTER INSTALLATION INSTRUCTIONS FOR IQ-SERIES PRODUCTS