GENESIS INSTALLATION INSTRUCTIONS

DETAIL A

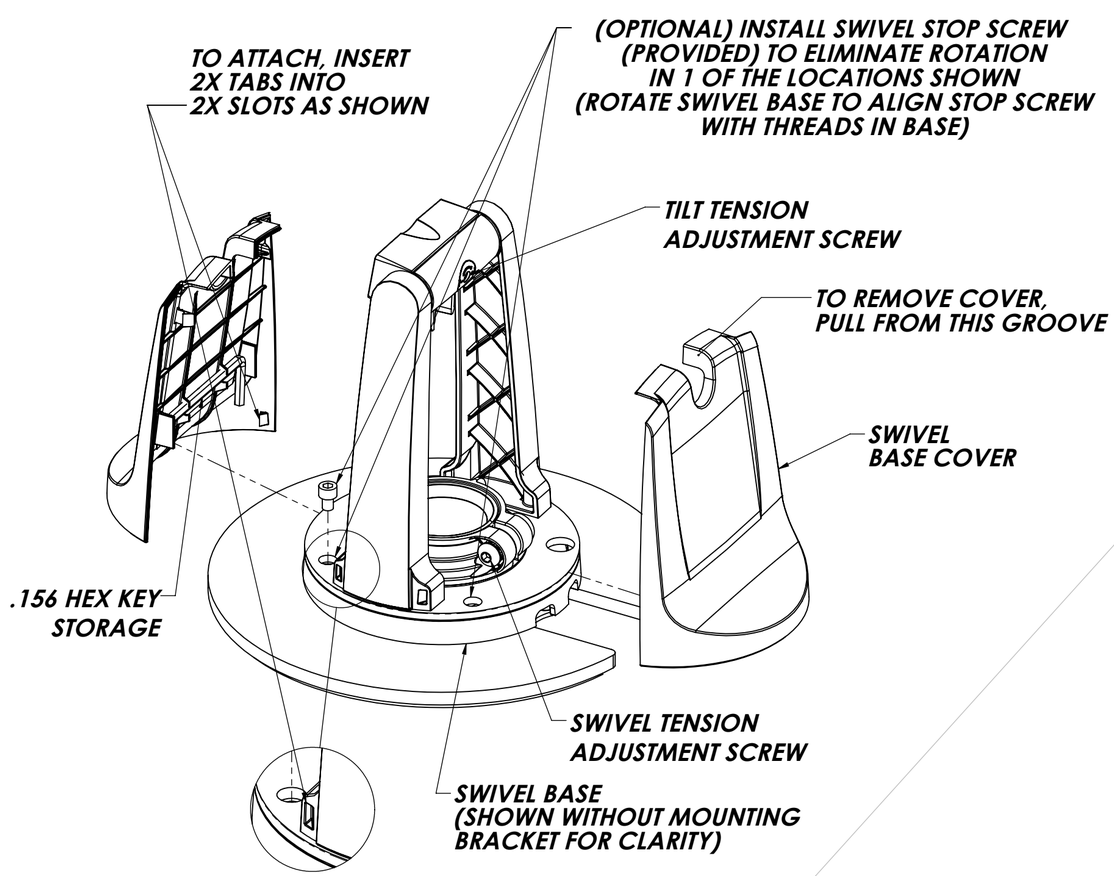

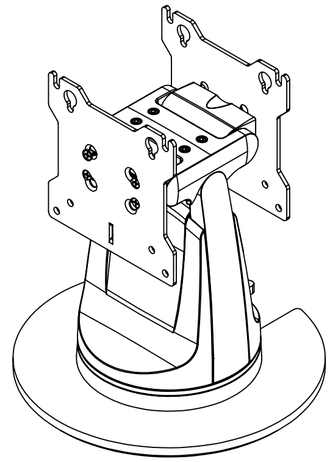

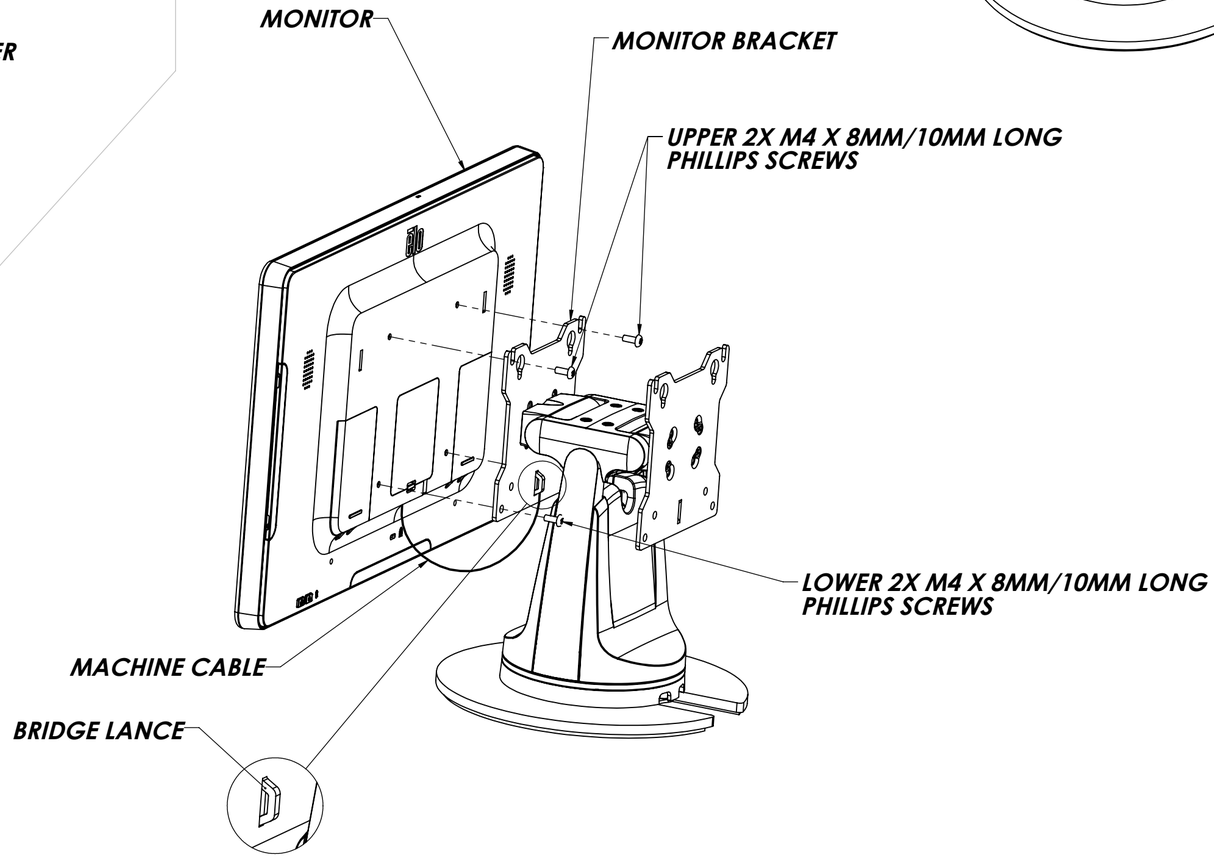

TOOL LIST:

1. #2 PHILLIPS SCREW OR DRILL DRIVER

ASSEMBLY STEPS:

1. ASSEMBLE THE ***UPPER 2X M4 X 8MM/10MM LONG PHILLIPS SCREWS*** INTO TOP HOLES OF **MONITOR** LEAVING 1/8" OF SPACE BETWEEN THE BACK OF THE ***MONITOR*** AND THE SCREW HEAD.
2. PLACE THE ***MONITOR*** ONTO ***MONITOR BRACKET***
3. INSTALL THE ***LOWER 2X M4 X 8MM/10MM LONG PHILLIPS SCREWS*** AND TIGHTEN THE ***UPPER 2X M4 X 8MM/10MM LONG PHILLIPS SCREWS***.
4. ROUTE ***MONITOR CABLE*** THROUGH BOTTOM AND OUT THE FRONT OF THE ***SWIVEL BASE.*** ATTACH ***MONITOR CABLE*** TO ***BRIDGE LANCE*** WITH CABLE TIE SHOWN IN **DETAIL C**. ROTATE ***CABLE CATCH*** CLOSED AS SHOWN IN **DETAIL D.**
5. TO ADJUST THE SWIVEL TENSION, TIGHTEN THE ***SWIVEL TENSION ADJUSTMENT SCREW*** TO INCREASE TENSION OR LOOSEN ***SWIVEL TENSION ADJUSTMENT SCREW*** TO DECREASE TENSION.
6. TO ADJUST THE TILT TENSION, TIGHTEN THE ***TILT TENSION ADJUSTMENT SCREW*** TO INCREASE TENSION OR LOOSEN ***TILT TENSION ADJUSTMENT SCREW*** TO DECREASE TENSION.
7. ATTACH THE ***SWIVEL BASE COVERS*** TO THE ***SWIVEL BASE*** AS SHOWN IN **DETAIL A**.

DETAIL A

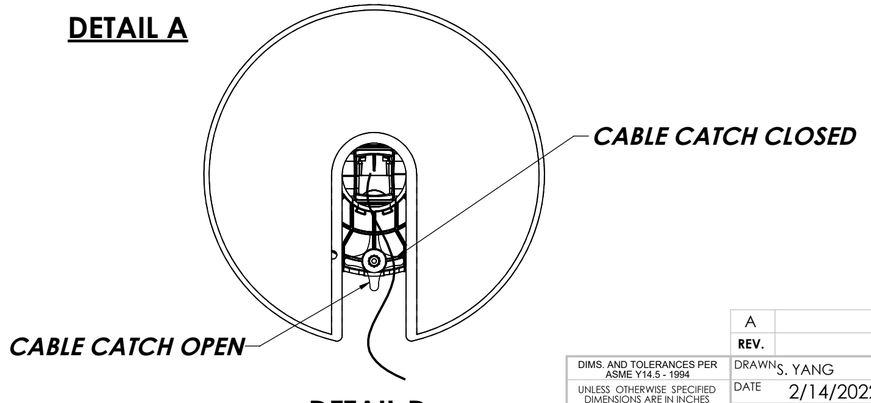

DETAIL D
BOTTOM OF SWIVEL STAND

REV.	DESCRIPTION	DATE	BY	CHK'D
A		02/14/22	SY	

DIMS. AND TOLERANCES PER ASME Y14.5 - 1994	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	
FRACTIONAL ± 1/32	
2 PLC. DEC. ± .03	
3 PLC. DEC. ± .010	
ANGULAR ± 0°30'	
DRAWN	S. YANG
DATE	2/14/2022
CHECKED	
DATE	
DO NOT SCALE DRAWING	
MATERIAL	-
FINISH	-

HAVIS

TITLE: DISPLAY MOUNT, DUAL VESA, STANDARD DUTY, FREE STANDING BASE

SIZE	DWG. NO.	REV.
C	DM-10-202	A

SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS IS PROHIBITED.