

RIGHT MOUNTING POSITION

**DS-PAN-100 SERIES DOCKING STATION SHOWN (NOT INCLUDED)
(DS-PAN-200 SERIES NOT SHOWN)**


E-SEEK 250 CARD READER (NOT INCLUDED)

USE OUTER SET OF HOLES WHEN MOUNTING TO THE RIGHT SIDE OF DOCK

2X 1/4-20 X 3/4 BHCS

2X 4-40 X 1/4 BHCS

MOUNTING BRACKET FOR E-SEEK 250

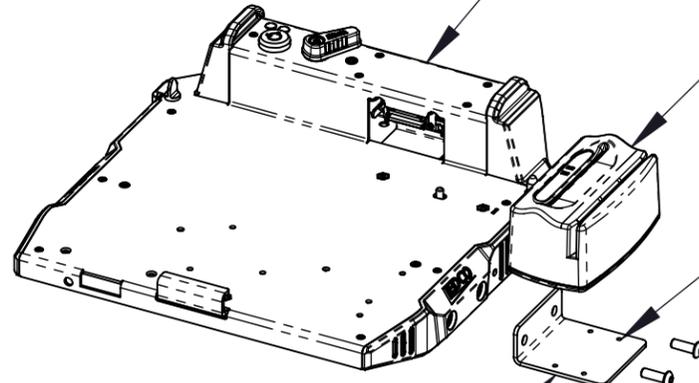

INSTALLATION INSTRUCTIONS:

1. REMOVE 2X 1/4-20 X 5/8 BHCS FROM THE SIDE OF THE DOCKING STATION. NOTE: BRACKET CAN BE MOUNTED TO EITHER RIGHT OR LEFT SIDE.
2. PLACE THE MOUNTING BRACKET UP TO THE SIDE OF THE DOCK AND ALIGN HOLES FOR SCREWS. NOTE: BRACKET CAN BE MOUNTED UP OR DOWN TO CHANGE THE HEIGHT OF THE E-SEEK 250 CARD READER.
3. FASTEN THE BRACKET TO THE DOCK WITH THE 2X 1/4-20 X 3/4 BHCS AND TORQUE TO 120 IN LBS ±10%.
4. PLACE THE E-SEEK 250 CARD READER ONTO THE BRACKET AND ALIGN THE HOLES FOR SCREWS.
5. FASTEN THE BRACKET TO THE CARD READER USING THE 2X 4-40 X 1/4 BHCS AND TORQUE TO 4 IN LBS ±10%.
6. MAKE SURE WIRES TO UNIT ARE PROPERLY SECURED TO DOCK CABLE TIE POSITIONS.

2X 1/4-20 X 3/4 BHCS



E-SEEK 250 CARD READER (NOT INCLUDED)

**DS-PAN-100 SERIES DOCKING STATION (NOT INCLUDED)
(DS-PAN-200 SERIES NOT SHOWN)**

USE INNER SET OF HOLES FOR MOUNTING ON THE LEFT SIDE OF DOCK

2X 4-40 X 1/4 BHCS

LEFT MOUNTING POSITION

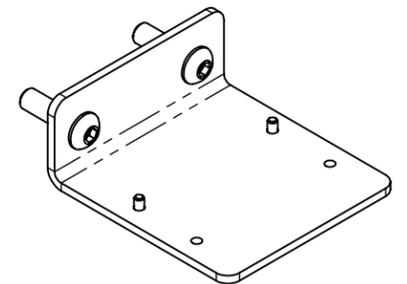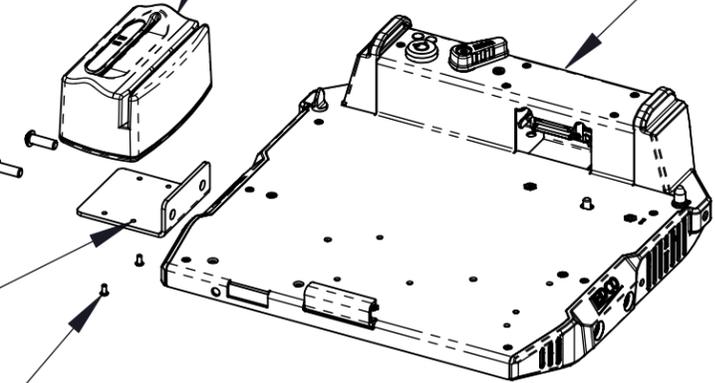

HARDWARE KIT CONTENTS:

DESCRIPTION	QTY.
SCREW-4-40 X 1/4" BHCS	2
SCREW-1/4-20 X 7/8" BHCS	2

PRODUCT I.D. DS-DA-207	DATE 03-17-09
PRODUCT NAME CARD READER MOUNT E-SEEK 250	

**DRAWING NUMBER:
DS-DA-207-INST**

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

PRODUCT DESCRIPTION

DS-DA-207 PROVIDES A MOUNTING SURFACE FOR THE CARD READER E-SEEK 250 TO THE SIDE OF THE DS-PAN-100 AND DS-PAN-200 SERIES DOCKING STATIONS. CAN BE MOUNTED TO EITHER THE RIGHT OR LEFT SIDE.



**WEIGHT: (LBS)
.31**
**REV. DATE
01-06-10**